


# VALVE HEAD W9 TYPE K MICRO PORT

ART. NO. 600049

## GENERAL

- The KEOFIT CLASSIC W9 Sampling Valve is the original and leading sterilizable sampling valve in the world. Used in all industries for decades. More than 320 standard valve configurations. Unique serial no. for each valve\*.
- The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.
- Cleaning/sterilizing: Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. Between samples: Valve in its normal closed position: cleanable by CIP as "Between batches" or the valve may be sterilized by means of steam SIP or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact Keofitt. Autoclavable.
- Designed for sampling of liquids with a viscosity of up to approx. 1.000 cP (MP: 50 cP) containing no particles larger than Ø3 mm (MP: Ø0.8 mm). Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).  
Built-in Micro Port septum to be used with hypodermic needle (#900022). Please note that the sealing capacity is reduced with piercing.



## FEATURES

- Installation: Threaded socket connection M22x1.5
- Operation: Key ring handle - not included (#600076)
- Membrane/septum: Silicone (#600251)

## CERTIFICATION\*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · 3-A Certificate · ATEX 2014/34/EU
- PED 2014/68/EU · FDA CFR 21 §177.2600 · USP Class VI · Keofitt DoC

## TECHNICAL DATA

### Material (process contact)

- Membrane SILICONE, GREY, MICRO PORT (#600251)

### Material (without process contact)

- Steel parts AISI 303 (1.4305) / AISI 316L (1.4404)
- O-ring SILICONE, RED (#400830 - #600825)

### Membrane

- Article SILICONE, GREY, MICRO PORT (#600251)
- Certification\*
  - EU EC 1935/2004 · EU EC 2023/2006
  - DK No. 1248 10/2018 · FDA CFR 21 §177.2600 · USP Class VI
  - REACH · RoHS · ADI Free · Keofitt DoC

### Pressure & Temperature



- Pressure 0 - 10 bar / 0 - 145 psi
- Temperature 1 - 130°C / 34 - 266°F
- Air supply -

### Net Weight

- kg/lbs 0.207 kg/0.455 lbs





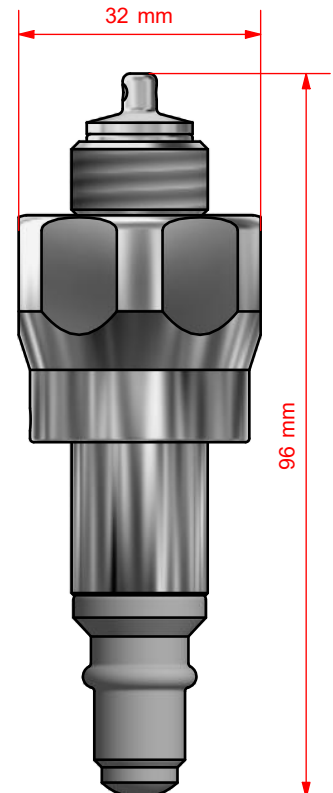







### Spareparts

- 776048 PARTS FOR W9 HEAD 600048/49



\*For further information and download please visit [www.keofitt.dk](http://www.keofitt.dk)














# KEOFITT CLASSIC W9 SAMPLING VALVE - BODIES

W9 BODIES					WELDING BODIES			
		TANK WELDING Ø28	PIPE WELDING 1"	PIPE WELDING NW25	IN-LINE VERTICAL	IN-LINE HORIZONTAL		
HOSE PIECE		 850001	 850011	 850014	 850027*	 850028*		
	1/2" TRI-CLAMP	 850006	 850010	On request		On request		
	THREAD M16X1,5	 850015	 850016	 850018	On request	On request		
	1/2" WELDING ENDS	 850007	 850019	On request		On request		

\* ON REQUEST ONLY!

- 24 -

12 13 14 15

CONNECTION BODIES							
VARIVENT Ø50	VARIVENT Ø68	MINI CLAMP	CLAMP 1" & 1½"	CLAMP 2"	CLAMP 3"	TREAD	
 850008	 850009	 850036	 850021	 850003	 850004	 M28X1,5 850031 DIN 11851 DN 10 850040	
 850020	 850013	 850039	 850022 850025	 850005 850026	On request		
On request	On request	On request	 850024	On request	On request		
On request	On request	On request	On request	On request	On request		

- 25 -

