

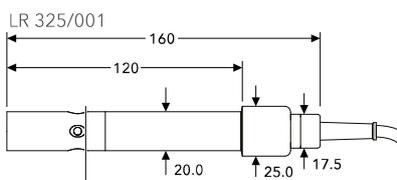
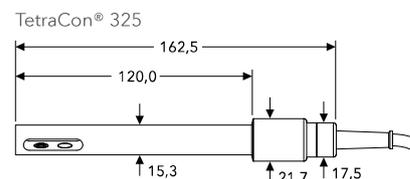


# Analogue conductivity measuring cells

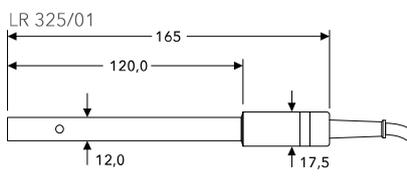

The analogue conductivity measuring cells are equipped with an integrated temperature compensation and cover all applications

We would like to inform you about the application range on our website [www.WTW.com](http://www.WTW.com)

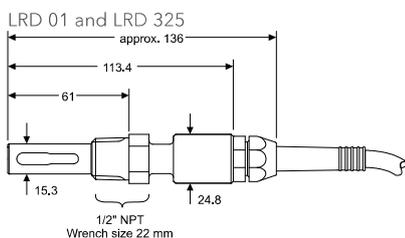

Minimum immersion depth 40 mm

## Technical Data

Model	LRD 01	LRD 325	LR 325/01	LR 325/001	TetraCon® 325	TetraCon® DU/T
<b>Measuring principle</b>	2 electrodes measuring cell	4 electrodes measuring cell	2 electrodes measuring cell		4 electrodes measuring cell	
<b>Measuring Range</b>	0.001 µS/cm ... 200 µS/cm	1 µS/cm ... 2 S/cm	0.001 µS/cm ... 200 µS/cm	0.0001 µS/cm ... 30 µS/cm	1 µS/cm ... 2 S/cm	
<b>Cell constant</b>	0.1 cm <sup>-1</sup> , ±2%	0.475 cm <sup>-1</sup> , ±1.5%	K = 0.1 cm <sup>-1</sup>	K = 0.01 cm <sup>-1</sup>	K = 0.475 cm <sup>-1</sup>	K = 0.778 cm <sup>-1</sup>
<b>Resolution</b>	Depends on measuring range					
<b>Temperature sensor</b>	Integrated NTC					
<b>Temperature Measurement</b>	0 °C ... +130 °C	0 °C ... +100 °C	-5 °C ... 80 °C			0 °C ... 60 °C
<b>Maximum pressure</b>	14 bar (at 20 °C)	10 bar (at 20 °C)	2 bar			
<b>Electrical Connection</b>	Integrated PU connection cable with 7-pole screw plug (IP 65)		Integrated cable mit 8-pole plug			8-pole socket for cable KKDU 325
<b>Mechanical</b>	Shaft	Stainless steel 1.4571			Epoxy	POM
	Kable gland	Brass, nickel-plated			-	-
	Connection head	-	POM			-
	Electrodes	Stainless steel 1.4571	Graphite	Stainless steel 1.4571		Graphite
	Protection Rating	IP65 (when connected)	IP68 (Sensor and cable) (Measuring cell until immersion length)		IP65 (when connected)	
<b>Weight (without cable)</b>	Approx. 350 g	Approx. 300 g	Approx. 135 g	Approx. 280 g	Approx. 135 g	Approx. 170 g
<b>Warranty</b>	2 years on defects in quality according to § 10 terms of conditions					

Model	Description	Order No.
<b>TetraCon® 325</b>	4 electrodes measuring cell, with integrated temperature sensor, cell constant K=0.475 cm <sup>-1</sup> , cable length 1.5 m	301960
<b>TetraCon® 325-3</b>	Like TetraCon® 325, but cable length 3 m	301970
<b>TetraCon® 325-6</b>	Like TetraCon® 325, but cable length 6 m	301971
<b>LRD 01-1,5</b>	2 electrodes measuring cell to be screwed into pipe, with integrated temperature sensor, cable length 1.5 m	302220
<b>LRD 01-7</b>	Like LRD 01-1,5, but cable length 7 m	302222
<b>LRD 325-1,5</b>	4 electrodes measuring cell to be screwed into pipe, with integrated temperature sensor, cable length 1.5 m	302225
<b>LRD 325-7</b>	Like LRD 325-1,5, but cable length 7 m	302229
<b>LR 325/01</b>	Conductivity measuring cell for ultrapure water, with integrated temperature sensor, cell constant K=0.1 cm <sup>-1</sup> , Glass flow-through vessel	301961
<b>LR 325/001</b>	Conductivity measuring cell for trace measurement, with integrated temperature sensor, cell constant K=0.01 cm <sup>-1</sup> , Stainless steel flow-through vessel	301962
<b>TetraCon DU/T</b>	4 electrodes flow-through measuring cell, with integrated temperature sensor, cell constant: K=0.0778 cm <sup>-1</sup>	301252



**Xylem Analytics Germany Sales GmbH & Co. KG, WTW**

Dr.-Karl-Slevogt-Straße 1 · D-82362 Weilheim · Germany · Phone: +49 881 1830 · Fax: +49 881 183-420 · Info.WTW@Xylem.com

All names are registered tradenames or trademarks of Xylem Inc. or one of its subsidiaries. Technical changes reserved.

© 2017 Xylem Analytics Germany Sales GmbH & Co. KG.

999264US

[www.WTW.com](http://www.WTW.com)

November 2018