



FLOWSERVE

Schmidt Armaturen

FlowPro™

Class 600, 1" - 12"

Application

Control of gases, vapours and liquids.

The modular concept of valve, multi spring actuator and our standard Positioner facilitates trouble free expansion to allow for the communication capability of the **FlowPro** Valve System.

With its simple design the **FlowPro** modular concept has a wide range of application.

Product features

Body shape gives optimum flow characteristic

- Excellent flow dynamics when correctly selected
- Heavy top guided plug
- Largest possible cv-values

Long service life and operational reliability

- With aggressive or evaporating media due to sturdy design
- Strong guides, give minimum vibration and wear

Replaceable trim

- Simple maintenance as the valve body remains in the piping when trim is replaced
- Screwed seat

Wide range of application


- Up to 8 cv-values are available per size
- Trims are generally interchangeable
- Spring loaded packing available

Certificates and Licenses

- **Quality assurance system** certified acc. EN ISO 9001 : 2000 including product development
- PED 97/23/EC Module H
- AK 7 Design acc. to DIN V19250/51 for Valves




The System

Actuators



Suitable for pneumatic or electrical linear actuators

Bonnets




Trim



Screwed Seats





Bodies






Covers

Within the series following combinations of bodies, trim, bonnets and actuators for each valve size are possible:

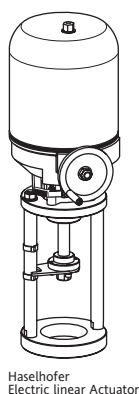

Suitable for linear thrust units
and electric rotary actuators



Contoured
Plug

Disk
Plug

Perforated
Plug

Contoured Plug,
top and
bottom
guided

Perforated
Plug,
top and
bottom
guided

RLS
two-step
Series 1

RLS
two-step
Series 2

RLS
three-step
Series 2



Contoured
Plug

Disk
Plug

Perforated
Plug


Contoured Plug,
top and
bottom
guided

Perforated
Plug,
top and
bottom
guided

RLS
two-step
Series 1

RLS
two-step
Series 2

RLS
three-step
Series 2



Body with Flange Connection

Body	Material	Certificate		Nominal Size DN								
		without	with	1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
Three-Flange	A216 WCB	Material resp. Pressure/leakage certificate Schmidt minimal Valve Standards acc. to PED 97/23EC Kat. III	Material resp. Pressure/leakage certificate acc. to EN 10 204 2.2, 3.1B, 3.1A Schmidt valves acc. to Customer Standard PED 97/23EC Kat. IV	•	•	•	•	•				
	A351 CF8M			•	•	•	•	•				
	A217 WC6			•	•	•	•	•				
Four-Flange	A216 WCB								•	•	•	•
	A351 CF8M								•	•	•	•
	A217 WC6								•	•	•	•

Form of Connection, Nominal Pressure Range

Form of Connection		
Flanges acc. to ANSI B16.5	Form RF	●
	Form RTJ	●
No standard	Form RFS	●

ANSI Class	Nominal Size DN								
	1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
600	●	●	●	●	●	●	●	●	●

Pressure-Temperature Ratings (acc. to ASME B 16.34a)

ANSI Class	Body Material	Service Temperature in	°F	-20	100	212	302	392	482	572	662	752	800	842	932	1000
			°C	-29	38	100	150	200	250	300	350	400	427	450	500	538
600	A216 WCB	Working Pressures in	psi	1480	1480	1345	1314	1273	1212	1124	1072	1002	825			
			bar	102	102	93	91	88	84	78	74	69	57			
	A351 CF8M	Working Pressures in	psi	1440	1440	1225	1118	1032	967	915	885	854	845			
			bar	99	99	85	77	71	67	63	61	59	58			
	A217 WC6	Working Pressures in	psi	1500	1500	1493	1443	1389	1340	1243	1165	1063	1015	982	733	430
			bar	103	103	103	100	96	92	86	80	73	70	68	51	30

Bonnet

Pressure Balancing	Body Material	Nominal Size	Bonnet		
			Standard Bonnet Use: general, up to 482 °F resp. 250 °C	Extension Bonnet Use: in case of possible overheating of packing and/or linear actuator, without pressure balancing up to 1000 °F resp. 538 °C	Bellows seal Bonnet Use: toxic, smell strong, fleeting, costly media, up to 752 °F resp. 400 °C
Unbalanced, shaft guided suitable for linear actuators	A216 WCB	1" to 12"	•	•	•
	A351 CF8M		•	•	•
	A217 WC6		•	•	•
V-Ring balanced, suitable for linear actuators, up to 482 °F resp. 250 °C	A216 WCB	3" to 12"	•		
	A351 CF8M		•		
Piston-Ring balanced, suitable for linear actuators, up to 842 °F resp. 450 °C	A216 WCB	2" to 12"		•	
	A217 WC6			•	
Unbalanced, suitable for linear thrust units, up to 1000 °F resp. 538 °C	A216 WCB	1" to 12"	•		
	A351 CF8M		•		
	A217 WC6		•		

Packing Box

Type of Packing			Bonnet		
			Standard Bonnet	Extension Bonnet	Bellows seal Bonnet
standard	PTFE-Rings	-20 °F up to 482 °F resp. -29 °C up to 250 °C, general use, BAM	•		•
	Pure Grafite-Rings	-20 °F up to 1000 °F resp. -29 °C up to 538 °C, general use, BAM	•	•	•
loaded	PTFE-Rings	-20 °F up to 482 °F resp. -29 °C up to 250 °C, general use, BAM	•		•
	Pure Grafite-Rings	-20 °F up to 1000 °F resp. -29 °C up to 538 °C, general use, BAM	•	•	•

Plug

Plug Type	Characteristic	Design						Guide of Plug		Flow	
		standard	partial stellited	full stellited	soft ³⁾ seated	hardened	nitrided	Top guided Seat 4 - 250	Top and bottom guided (only Four-Flange) Seat 84 - 250	Flow Action tends to open valve	Flow Action tends to close valve
Contoured Plug general use	equal percentage	●	●	●	●	●		●	●	●	
	linear	●	●		●			●	●	●	
Contoured Plug with Silentpack by gases, vapours, for reducing noise ≤ 18 dB(A)	equal percentage	●	●	●	●			●	●	●	
	linear	●	●		●			●	●	●	
Disk Plug	on / off	●			●			●		●	●
Perforated Plug in case of cavitation, high differential pressure by gases, vapours, for reducing noise ≤ 18 dB(A)	equal percentage	●				●	●	●	●	●	●
	linear	●				●	●	●	●	●	●
RLS -Units for reducing noise ≤ 30 dB(A)	equal percentage	●				●	●	●	●	●	●
	linear	●				●	●	●	●	●	●

Contoured Plug

Characteristic: modified - equal percentage

C _v (gpm) without/ with Silentpack ²⁾		k _{vs} (m³/h) without/ with Silentpack ²⁾		Port Size	Guide of plug	Material / Design						Incorporable seat diameter depends on nominal size									
						stand- ard	316 SS			1.4122 ¹⁾		1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"	
												Stroke = 20 mm			40 mm		80 mm				
0.18	-	0.16	-	4	1			●			●	●									
0.29	-	0.25	-	4	1			●			●	●									
0.46	-	0.40	-	4	1			●		●	●	●									
0.73		0.63		6	1	●		●		●	●	●									
1.8		1.6		8	1	●		●		●	●	●									
2.9		2,5		10	1	●		●		●	●	●									
4.6		4,0		12	1	●	●	●	●	●	●	●									
7.3		6,3		16	1	●	●	●	●	●	●	●	●								
11.6		10,0		20	1	●	●	●	●	●	●	●	●	●							
18.5		16,0		25	1	●	●	●	●	●	●		●	●							
-	23	-	20	34	1	●	●	●	●					●							
29	-	25	-	34	1	●	●	●	●	●	●			●	●						
-	29	-	25	34	1	●	●	●	●						●						
-	36.4	-	31,5	42	1	●	●	●	●						●						
46	-	40	-	42	1	●	●	●	●	●	●				●	●					
-	46	-	40	42	1	●	●	●	●							●					
73		63		53	1	●	●	●	●	●	●					●	●				
-	104	-	90	67	1	●	●	●	●							●					
116	-	100	-	67	1	●	●	●	●	●	●					●	●				
-	116	-	100	67	1	●	●	●	●								●				
-	145	-	125	84	1	●	●	●	●								●				
185	-	160	-	84	1	●	●	●	●	●	●						●				
185	-	160	-	84	1/2	●	●	●	●	●	●							●			
-	185	-	160	84	1/2	●	●	●	●									●			
-	208	-	180	100	1/2	●	●	●	●									●			
231	-	200	-	100	1/2	●	●	●	●	●	●							●	●		
-	231	-	200	100	1/2	●	●	●	●										●		
-	324	-	280	125	1/2	●	●	●	●									●			
-	364	-	315	125	1/2	●	●	●	●										●		
410	-	355	-	125	1/2	●	●	●	●	●	●							●	●	●	
-	410	-	355	125	1/2	●	●	●	●											●	
-	410	-	355	150	1/2	●	●	●	●										●		
520	-	450	-	150	1/2	●	●	●	●	●	●								●	●	
-	520	-	450	150	1/2	●	●	●	●											●	
820	728	710	630	200	1/2	●	●	●	●	●	●								●	●	
1156	925	1000	800	250	1/2	●	●	●	●	●	●									●	

¹⁾ Only for body A216 WCB, A217 WC6 !

²⁾ Only for Contoured Plug and 316 SS !

³⁾ On request !

Contoured Plug

Characteristic: linear

C _v (gpm) without with Silentpack 2)	k _{vs} (m ³ /h) without with Silentpack 2)	Port Size	Guide of plug	Material / Design					Incorporable seat diameter depends on nominal size								
									1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
				stand- ard	316 SS partial stellite	soft 4) seated	1.4122 1) stand- ard	hard- ened	Stroke = 20 mm			40 mm		80 mm			
4.6	4,0	12	1	•	•	•	•	•	•								
7.3	6,3	16	1	•	•	•	•	•	•								
11.6	10,0	20	1	•	•	•	•	•	•								
18.5	16,0	25	1	•	•	•	•	•									
-	23	-	20	34	1	•	•	•									
29	-	25	-	34	1	•	•	•									
-	29	-	25	34	1	•	•	•									
-	36.4	-	31,5	42	1	•	•	•									
46	-	40	-	42	1	•	•	•									
-	46	-	40	42	1	•	•	•									
73	-	63	-	53	1	•	•	•									
-	104	-	90	67	1	•	•	•									
116	-	100	-	67	1	•	•	•									
-	116	-	100	67	1	•	•	•									
-	145	-	125	84	1	•	•	•									
185	-	160	-	84	1	•	•	•									
185	-	160	-	84	1/2	•	•	•									
-	185	-	160	84	1/2	•	•	•									
-	208	-	180	100	1/2	•	•	•									
231	-	200	-	100	1/2	•	•	•									
-	231	-	200	100	1/2	•	•	•									
-	324	-	280	125	1/2	•	•	•									
-	364	-	315	125	1/2	•	•	•									
410	-	355	-	125	1/2	•	•	•									
-	410	-	355	125	1/2	•	•	•									
-	410	-	355	150	1/2	•	•	•									
520	-	450	-	150	1/2	•	•	•									
-	520	-	450	150	1/2	•	•	•									
820	728	710	630	200	1/2	•	•	•									
1156	925	1000	800	250	1/2	•	•	•									

Rangeability

Standard Rangeability: Seat ≤ 20 mm - Rangeability 1 : 30 Seat > 20 mm - Rangeability 1 : 50	Special Rangeability at Contoured Plug and modified-equal percentage Characteristic: Seat ≤ 20 mm - Rangeability 1 : 70 Seat > 20 mm - Rangeability 1 : 100
--	---

Disk Plug

Characteristic: on / off

C _v (gpm)	k _{vs} (m ³ /h)	Port Size	Guide of plug	Material / Design			Incorporable seat diameter depends on nominal size								
							1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
				stand- ard	316 SS soft seated 4)	1.4122 3) stand- ard	Stroke = 20 mm			40 mm		80 mm			
11.6	10,0	20	1	•	•	•	•								
29	25	34	1	•	•	•									
46	40	42	1	•	•	•									
116	100	67	1	•	•	•									
185	160	84	1	•	•	•									
462	400	125	1	•	•	•									
728	630	150	1	•	•	•									
1156	1000	200	1	•	•	•									
1850	1600	250	1	•	•	•									

1) Only for body A216 WCB, A217 WC6 and Piston-Ring Balancing !

2) Only for Contoured Plug and 316 SS !

3) Only for body A216 WCB, A217 WC6 !

4) On request !

Perforated Plug

Characteristic: modified - equal percentage

C _V (gpm)	k _{vs} (m³/h)	Port Size	Guide of plug	Material / Design			Incorporable seat diameter depends on nominal size								
				316 SS nitrided	1.4122 ¹⁾ standard hardened		1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
				Stroke = 20 mm			40 mm			80 mm					
2.9	2,5	20	1	●	●	●	●								
4.6	4,0	20	1	●	●	●	●	●							
7.3	6,3	20	1	●	●	●	●	●	●						
11.6	10,0	25	1	●	●	●		●	●						
23	20	34	1	●	●	●		●	●						
29	25	42	1	●	●	●			●						
32	28	42	1	●	●	●				●					
57,8	50	53	1	●	●	●				●	●				
82	71	67	1	●	●	●				●	●				
116	100	84	1	●	●	●				●					
185	160	84	1/2	●	●	●					●				
231	200	100	1/2	●	●	●					●	●			
324	280	125	1/2	●	●	●					●	●	●		
462	400	150	1/2	●	●	●						●	●	●	
578	500	200	1/2	●	●	●							●	●	
820	710	250	1/2	●	●	●									●

Perforated Plug

Characteristic: linear

C _V (gpm)	k _{VS} (m³/h)	Port Size	Guide of plug	Material / Design			Incorporable seat diameter depends on nominal size								
				316 SS nitrided	1.4122 ¹⁾		1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
					standard	hardened									
2.9	2,5	20	1	●	●	●	●								
4.6	4,0	20	1	●	●	●	●	●							
7.3	6,3	20	1	●	●	●	●	●	●						
11.6	10,0	25	1	●	●	●		●	●						
23	20	34	1	●	●	●		●	●						
32	28	42	1	●	●	●			●						
57.8	50	53	1	●	●	●				●	●				
104	90	67	1	●	●	●				●	●				
145	125	84	1	●	●	●					●				
185	160	84	1/2	●	●	●						●			
231	200	100	1/2	●	●	●						●	●		
364	315	125	1/2	●	●	●						●	●	●	
578	500	150	1/2	●	●	●							●	●	●
728	630	200	1/2	●	●	●								●	●
1040	900	250	1/2	●	●	●									●

RLS-Design

Characteristic: modified - equal percentage / linear

Plug Type	k _{vq} (m³/h)	Port Size	Guide of plug	Material / Design			Incorporable seat diameter depends on nominal size								
				316 SS nitrided	1.4122 ¹⁾		1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
					standard	hardened									
							Stroke = 20 mm		40 mm		80 mm				
RLS 2-step	4,0	20	1	●	●	●	The kvq-values will be adapted on the operating conditions !								
RLS 2-step	to	to	2	●	●	●									
RLS 3-step	600	250	2	●	●	●									

¹⁾ Only for body A216 WCB, A217 WC6 !


Leakage-class acc. DIN/IEC 534 Teil 4 resp. ANSI/FCI 70-2 - 1991

Plug with Pressure Balancing	Plug Design	Leakage-class acc. DIN/IEC 534	Test Medium	Test Pressure (bar)	max. Seat Leakage in % of C _v
Unbalanced	metal-to-metal seated	IV	Water	Working Pressure, max. 4	0,01
	metal-to-metal seated, reseated	IV-S1	Water	Working Pressure, max. 4	0,0005
	mtm-seated, reseated, heightened seal force	IV-S2	Air	Working Pressure, max. 4	0,0001
	mtm-seated, reseated, heightened seal force	V	Water	Working Pressure	0,000001
	soft seated	VI	Air	Working Pressure, max. 4	0,0 - bubble-tight
V-Ring balanced	metal-to-metal seated	IV	Water	Working Pressure, max. 4	0,01
Piston-Ring balanced	metal-to-metal seated	III	Water	Working Pressure, max. 4	0,1

Multi-Spring Actuator

Actuators are selected for use on **FLOWPRO**:

Actuator Size	Stroke (mm)	Spring ranges (psi)		Spring ranges (bar)	
		Spring closes	Spring opens	Spring closes	Spring opens
PD 252	20		1.5 - 14.5		0,1 - 1,0
			7.3 - 27.6		0,5 - 1,9
		14.5 - 34.8		1,0 - 2,4	
		21.8 - 39.2		1,5 - 2,7	
		29.0 - 69.6		2,0 - 4,8	
PD 502	20		2.9 - 14.5		0,2 - 1,0
			7.3 - 27.6		0,5 - 1,9
		14.5 - 34.8		1,0 - 2,4	
		21.8 - 39.2		1,5 - 2,7	
		29.0 - 69.6		2,0 - 4,8	
	40		2.9 - 14.5		0,2 - 1,0
			7.3 - 27.6		0,5 - 1,9
		14.5 - 34.8		1,0 - 2,4	
		21.8 - 39.2		1,5 - 2,7	
		29.0 - 69.6		2,0 - 4,8	
PD 700	20	11.6 - 39.2		0,8 - 2,7	
	40		2.9 - 14.5		0,2 - 1,0
			7.3 - 27.6		0,5 - 1,9
		14.5 - 34.8		1,0 - 2,4	
		21.8 - 39.2		1,5 - 2,7	
		29.0 - 69.6		2,0 - 4,8	
PD 1500	20	11.6 - 23.2		0,8 - 1,6	
			2.9 - 14.5		0,2 - 1,0
			5.8 - 17.4		0,4 - 1,2
		11.6 - 23.2		0,8 - 1,6	
		17.4 - 29.0		1,2 - 2,0	
	40	21.8 - 33.4		1,5 - 2,3	
			2.9 - 21.8		0,2 - 1,5
			5.8 - 24.7		0,4 - 1,7
		11.6 - 30.5		0,8 - 2,1	
		17.4 - 36.3		1,2 - 2,5	
PD 3000	80	31.9 - 55.1		2,2 - 3,8	
			2.9 - 21.8		0,2 - 1,5
			5.8 - 24.7		0,4 - 1,7
		11.6 - 30.5		0,8 - 2,1	
		18.9 - 37.7		1,3 - 2,6	

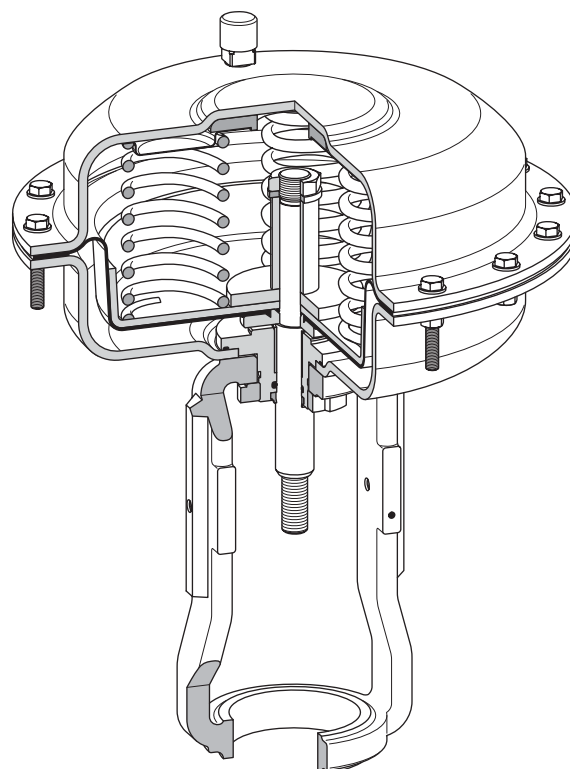

Positioner System

Product features

SRI990 Analog Positioner (direct mounting !)

Product Specification PSS EVE 0107 A

- Configuration by means of switches and potentiometers
- Low air consumption
- Supply air pressure up to 6 bar (90 psig)
- Attachment to stroke actuators directly or acc. to IEC 534 part 6 (NAMUR)
- Protection class IP 65 and NEMA 4X
- Explosion protection: EEx ia IIC acc. to CENELEC or "Intrinsic safety" acc. to FM and CSA
- Additional equipments
- Integrated inductive limit switches
- Gauge attachment
- Booster relay

SRD992 Digital Positioner (direct mounting !)

Product Specification PSS EVE 0106 A

Technical data same as SRI990 with additional features

- Autostart with self-calibration
- Selfdiagnostics
- Configuration by means of local keys and LEDs
- Position feedback

SRD991 Intelligent Positioner (direct mounting !)

Product Specification PSS EVE 0105 A

Technical data same as SRD992 with additional features

- Self diagnostics, status- and diagnostic messages
- Communication HART, FoxCom, PROFIBUS-PA or FOUNDATION Fieldbus H1
- Configuration by means of local keys, hand-held terminal, PC or I/A Series system
- Sensors for supply air pressure and output pressure optional
- Additional Inputs / outputs

SRP981 Pneumatic Positioner

Product Specification PSS EVE 0101 A

- Input signal range 0,2 - 1,0 bar (split range up to 4-fold possible)
- Independent adjustment of stroke range and zero
- Low vibration effect in all directions
- Supply pressure up to 6 bar
- Single or double-acting
- Mounting according to IEC 534, part 6 (NAMUR)
- Electrical limit switches optional
- Connection manifold optional
- Booster optional

FRS 107 Airset


- Max. supply pressure up to 10 bar
- Output range 0,3 - 10 bar
- Filter 5 µm
- Manually operated drain
- With gauge

MV - valve (direct mounting !)


Tubing

- without, by direct mounting
- Steel, chromatised
- Stainless steel

Any further information see product specifications sheet.

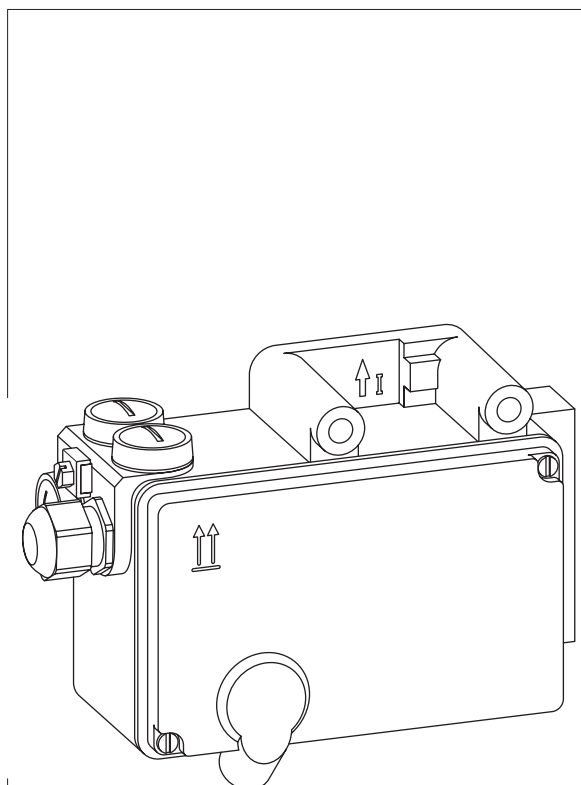


SRD992 Digital Positioner

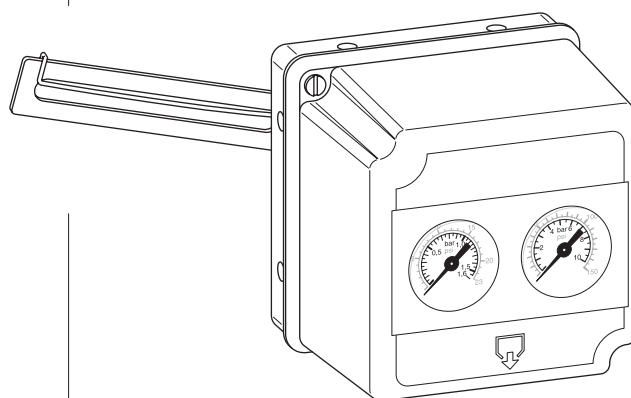

SRP 981 Pneumatic Positioner

Haselhofer-Actuator


Actuators are selected for use on
FLOWPRO:

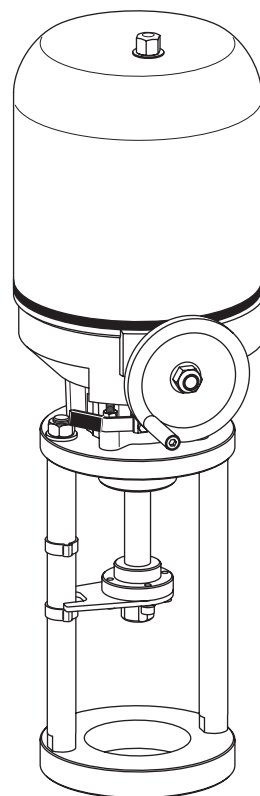

Linear actuator	Voltage	Power input (230V, 50Hz)
ED 1,2	alternating current 230 V, 50 Hz 400 V, 50 Hz	7 W
ED 4,5		28 W / 32 W
ED 8		60 W / 130 W
ED 12		60 W / 130 W
ED 20	direct current 24 V	145 W / 165 W
ED 25		145 W / 165 W

Linear thrust Unit


Thrust Unit selected for use on
FLOWPRO:

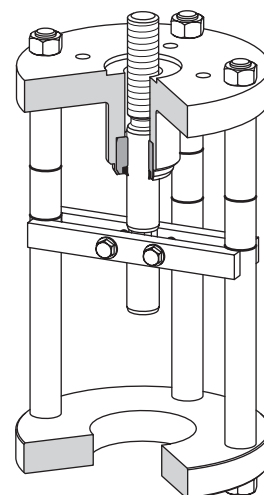

Linear thrust Unit	Connection	max. Torque
LD 12	acc. to ISO 5210 form A trapezoid thread 24 x 5 left	30 Nm
LD 16		50 Nm
LD 20		80 Nm


Linear thrust Unit

Thrust Unit selected for use on
FLOWPRO:

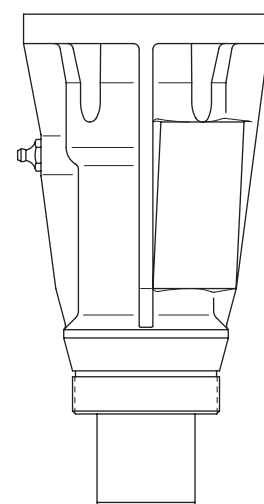

Linear thrust Unit	For Output drives acc. to DIN 3210 type D	max. Torque
SD 15 Stroke 40 mm	Flange size G0	30 Nm
SD 35 Stroke 40 mm		100 Nm
SD 36 Stroke 80 mm		100 Nm
SD 75 Stroke 80 mm	Flange size G1/2	250 Nm
SD 120 Stroke 80 mm		500 Nm
SD 200 Stroke 80 mm	Flange size G3	1000 Nm
SD 300 Stroke 80 mm	Flange size G4	1700 Nm

Parts List (Symbolic Drawing)

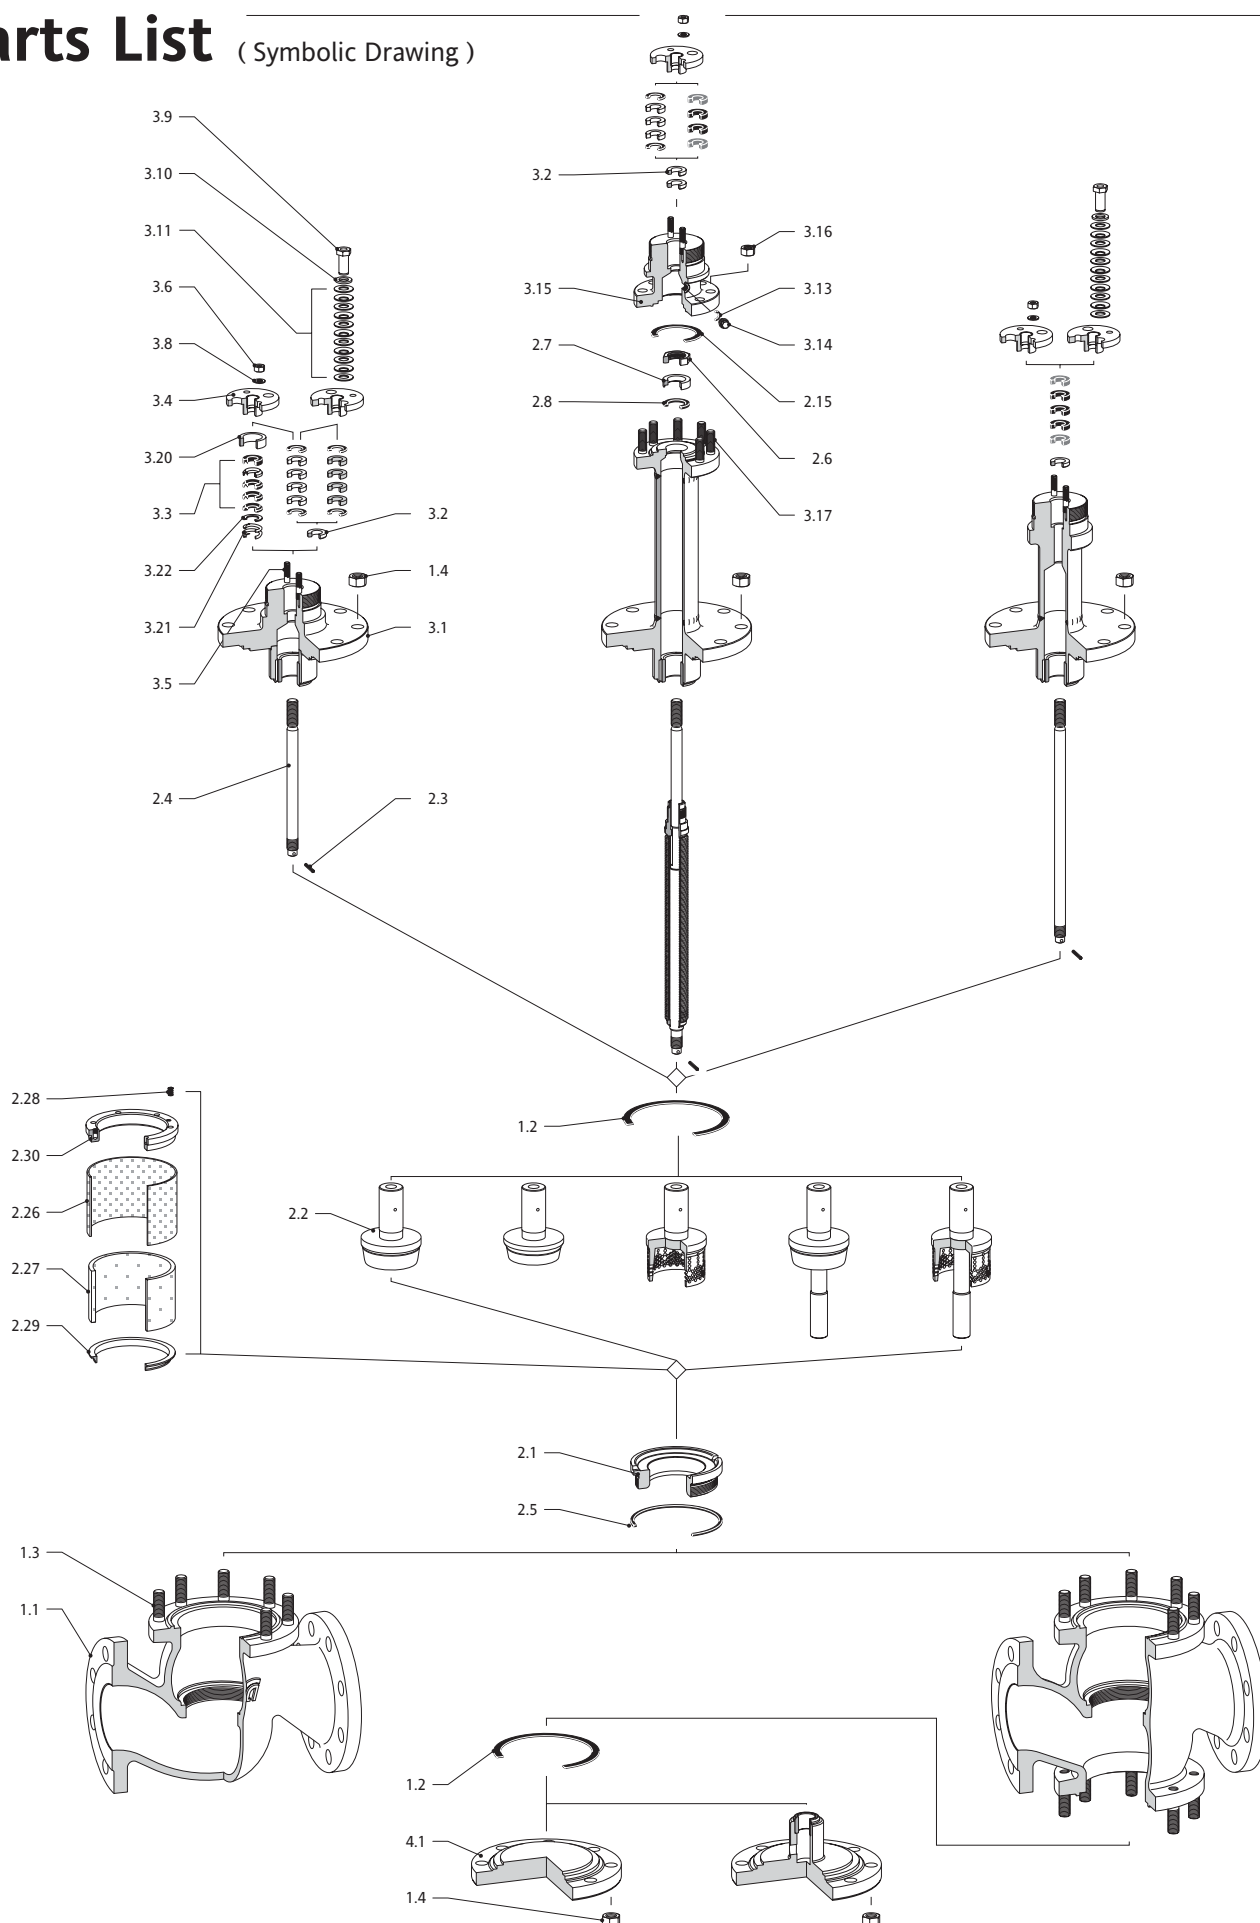

Designation	Part	Materials			Spare Parts
Body	1.1	A216 WCB	A217 WC6	A351 CF8M	
Bonnet Gasket	1.2	Pure Grafite ¹⁾			D
Stud Bolt	1.3	A193 B5		A193 B8 M2	
Hex Nut	1.4	A194 3		A194 8 M	
Screwed Seat	2.1	316 SS / 1.4122	316 SS / 1.4122	316 SS	S
Contoured Plug	2.2	316 SS / 1.4122	316 SS / 1.4122	316 SS	K
Disk Plug					
Perforated Plug					
Spring Pin	2.3	304			
Stem	2.4	316 SS Cold-finished			
Bellows		316 SS	-	316 SS	
Profil Ring	2.5	Pure Grafite			S
Hex Nut	2.6	316 SS	-	316 SS	
Seal Carrier	2.7	316 SS	-	316 SS	
Profil Ring	2.8	Pure Grafite	-	Pure Grafite	D
Head Gasket	2.15	Pure Grafite ¹⁾	-	Pure Grafite ¹⁾	
Perforated Cage	2.26	316 SS			K
Wire Netting	2.27	1.4404			
Spring	2.28	1.4310			
Internal Ring	2.29	316 SS			
Distance Bush	2.30	316 SS			
Standard Bonnet	3.1	A 105	A 182 F11	A 182 F 316 L	
Bellows-Seal Bonnet			-		
Finned Bonnet			A 182 F11		
Bottom Ring	3.2	316 SS			
Packing Box	3.3	PTFE-Rings			D
unloaded		Pure-Grafite Rings			
Spring loaded		PTFE-Rings			
		Pure-Grafite Rings			
Gland Flange	3.4	316 SS			
Stud Bolt	3.5	A193 B8 M2			
Hex Nut	3.6	A194 8 M			
Plain Washer	3.8	304			
Hex Nut	3.9	316 SS			
Plain Washer	3.10	316 SS			
Belleville Spring	3.11	301			
Gasket	3.13	Pure Grafite ²⁾	-	Pure Grafite ²⁾	D
Locking Screw	3.14	304	-	304	
Head	3.15	A 105	-	A 182 F 316 L	
Hex Nut	3.16	A194 3	-	A194 8 M	
Stud Bolt	3.17	A193 B5	-	A193 B8 M2	
Cover	4.1	A 105	A182 F11	A 182 F 316 L	


- ¹⁾ Pure Grafite on Support Plate from 316 SS
²⁾ Pure Grafite on Support Plate from MYLAR

K Plug Set
 S Seat Set
 D Gasket Set


Special Materials on request !

Dimensions


Valve with Three-Flange Body



Valve with
Standard Bonnet




Valve with
Extension Bonnet




Valve with
Bellows seal Bonnet


Valve with Four-Flange Body



Valve with
Standard Bonnet



Valve with
Extension Bonnet

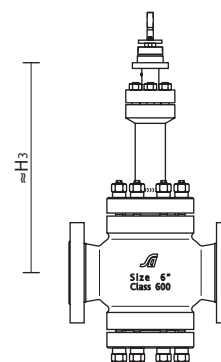


Valve with
Bellows seal Bonnet

Designations				Nominal Size DN								
				1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
				Stroke = 20 mm			40 mm		80 mm			
BL Face to Face Dimensions acc. to ANSI / ISA S75.03	Flange Form RF, RFS	in.	8.25	9.88	11.25	13.25	15.50	20.00	24.00	29.62	32.25	
		mm	209,6	251,0	285,8	336,6	393,7	508,0	609,6	752,3	819,2	
	Flange Form RTJ	in.	8.25	9.88	11.37	13.37	15.62	20.12	24.12	29.74	32.37	
		mm	209,6	251,0	288,8	339,6	396,7	511,0	612,6	755,4	822,2	
≈ h		in.						12.40	15.94	18.90	21.06	
		mm						315	405	480	535	
≈ H1 Standard Bonnet		in.	6.30	7.68	8.35	8.54	9.92	12.99	16.02	19.02	20.98	
		mm	160	195	212	217	252	330	407	483	533	
≈ H2 Extension Bonnet		in.	6.30	7.68	8.35	15.35	16.69	19.76	22.83	25.79	27.76	
		mm	160	195	212	390	424	502	580	655	705	
≈ H3 Bellows seal Bonnet		in.	12.80	14.17	14.17	21.65	21.65	35.63	35.63	35.63	35.63	
		mm	325	360	360	550	550	905	905	905	905	
≈ Weight for Three-Flange Body	Standard Bonnet	lbs	43	66	97	185	293					
		kg	19,5	30	44	84	133					
	Extension Bonnet	lbs	43	66	97	189	299					
		kg	19,5	30	44	86	136					
	Bellows seal Bonnet	lbs	57	84	110	216	317					
		kg	26,0	38	50	98	144					
≈ Weight for Four-Flange Body	Standard Bonnet	lbs						704	1320	2158	2933	
		kg						320	600	981	1333	
	Extension Bonnet	lbs						711	1327	2165	2939	
		kg						323	603	984	1336	
	Bellows seal Bonnet	lbs						748	1331	2130	2882	
		kg						340	605	968	1310	
	Flanges Drilled and Dimensioned acc. to			ANSI B16.5, Form RF or RTJ								


Dimensions for Heavy Duty Bonnet

Valve with Three-Flange Body

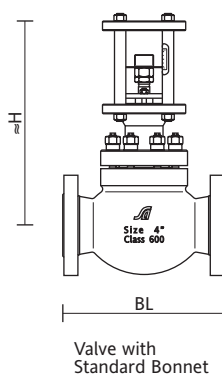

Valve with Standard Bonnet

Valve with Four-Flange Body

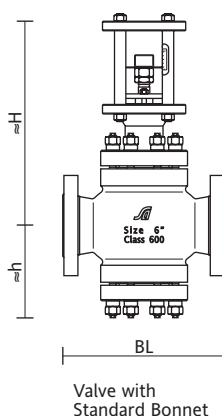


Valve with Standard Bonnet

Designations				Nominal Size DN								
				1"	1 1/2"	2"	3"	4"	6"	8"	10"	12"
				Stroke = 20 mm			40 mm		80 mm			
BL Face to Face Dimensions acc. to ANSI / ISA S75.03	Flange Form RF, RFS	in.	8.25	9.88	11.25	13.25	15.50	20.00	24.00	29.62	32.25	
		mm	209,6	251,0	285,8	336,6	393,7	508,0	609,6	752,3	819,2	
	Flange Form RTJ	in.	8.25	9.88	11.37	13.37	15.62	20.12	24.12	29.74	32.37	
		mm	209,6	251,0	288,8	339,6	396,7	511,0	612,6	755,4	822,2	
≈ h		in.						12.40	15.94	18.90	21.06	
		mm						315	405	480	535	
≈ H1 Standard Bonnet - Heavy Duty Design		in.	13.07	14.61	15.28	22.05	20.08	32.01	35.24	36.42	38.58	
		mm	332	371	388	560	510	813	895	925	980	
≈ Weight for Three-Flange Body	Standard Bonnet	lbs	66	88	119	231	372					
		kg	30	40	54	105	169					
≈ Weight for Four-Flange Body	Standard Bonnet	lbs						891	1514	2370	3151	
		kg						405	688	1077	1432	
Flanges Drilled and Dimensioned acc. to			ANSI B16.5, Form RF or RTJ									


Pneumatic linear Actuator

with NAMUR-Yoke


Designation	Area	250	500		700	
	Stroke	20 mm		40 mm	20 mm	40 mm
ø A	in.	10.43	13.86	13.86	15.94	15.94
	mm	265	352	352	405	405
≈ H	in.	12.99	16.54	17.72	21.46	21.46
	mm	330	420	450	545	545
≈ Weight	lbs	35	68	88	101	101
	kg	16	31	40	46	46

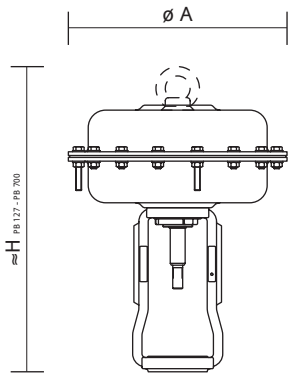

Designation	Area	1500	3000
	Stroke	20, 40, 80 mm	40, 80 mm
ø A	in.	21.65	21.65
	mm	550	550
≈ H	in.	32.87	44.88
	mm	835	1140
≈ Weight	lbs	253	319
	kg	115	145

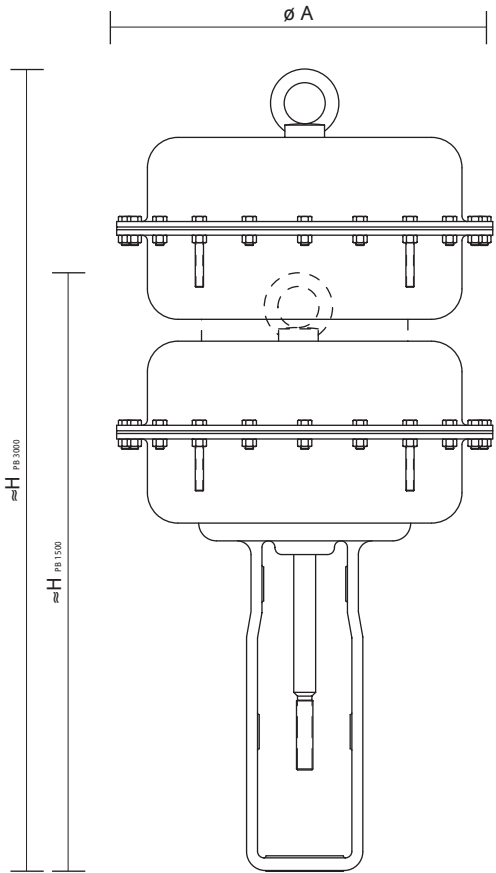


Haselhofer - Electric linear Actuator

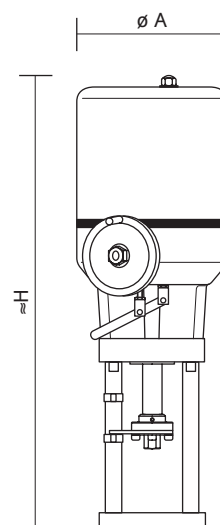


Designation	Actuator	ED 1,2	ED 4,5	ED 8	ED 12	ED 20	ED 25
	Stroke	20 mm	20/40 mm	20 / 40 / 80 mm			80 mm
ø A	in.	5.71	5.71	7.24	7.24	8.50	8.50
	mm	145	145	184	184	216	216
≈ H	in.	19.88	21.06	22.44	22.44	25.98	25.98
	mm	505	535	570	570	660	660
≈ Weight	lbs	14	17	29	29	42	42
	kg	6,5	7,5	13	13	19	19

Linear thrust Unit



Designation	Linear Unit	LD 12	LD 16	LD 20
	Stroke	20 mm	40 mm	80 mm
ø A	in.	7.72	7.72	7.72
	mm	196	196	196
≈ H	in.	9.45	12.60	16.02
	mm	240	320	407
≈ Weight	lbs	26	37	44
	kg	12	17	20

Linear thrust Unit



Designation	Linear Unit	SD 15	SD 35	SD 36	SD 75	SD120	SD200	SD300
	Stroke	40 mm			80 mm			
ø A	in.	4.92	4.92	6.89	6.89	6.89	8.27	11.81
	mm	125	125	175	175	175	210	300
≈ H	in.	6.50	6.50	11.42	11.02	11.02	13.19	16.14
	mm	165	165	290	280	280	335	410
≈ Weight	lbs	17	17	55	48	48	101	205
	kg	7,5	7,5	25	22	22	46	93

SPM - Code

Type	DN	PN	Body/Cert.	Plug	Seat	c _v	Trim	Actuator
V760 D FVNA	2"	600	A216 WCB/BB	PN1GG	42	46	316 SS	

Body Form

Three-Flange Body D
Four-Flange Body V

Form of Connection

Flange acc. to ANSI B16.5 Form RF F
 Form RTJ J
 Form RFS U

Bonnet Form

without Pressure Balancing V
with V-Ring Balancing O
with Piston-Ring Balancing K
Heavy Duty Design S

Bonnet Assembly

Standard Bonnet N
Bellows seal Bonnet F
Extension Bonnet R

Packing Box Assembly

PTFE-Rings, adjustable, BAM A
Pure Grafite-Rings, adjustable, BAM B

PTFE-Rings, loaded, BAM N
Pure Grafite-Rings, loaded, BAM O

Nominal Size 1" - 12"

ANSI Class 600 600

Body Material

A216 WCB
A351 CF8M
A217 WC6

Material Certificat

without O
acc. EN 10 204 - 2.2 Z
acc. EN 10 204 - 3.1B B
acc. EN 10 204 - 3.1A A

Pressure and Leakage Certificat

without . O
acc. EN 10 204 - 2.2 . Z
acc. EN 10 204 - 3.1B . B
acc. EN 10 204 - 3.1A . A

316 SS Plug, Seat-Material
1.4122

c_v - value 0.18 - 1850

Port Size 4 - 250

Flow tends to open Valve G
Flow tends to close Valve I

Characteristic

modified-equal percentage G
linear L
on / off A
modified-equal percentage H
with special rangeability

Plug Guidance

top 1
top and bottom 2

Plug Type

standard N
standard, IEC 534-4 Class IV S1 E
partial stellited D
partial stellited, IEC 534-4 Class IV S1 L
full stellited K
full stellited, IEC 534-4 Class IV S1 F
soft seated W
hardened H
nitrided T

Plug

Contoured plug P
Contoured plug with Silentpack K
Disk plug T
Perforated plug L
RLS-unit, 2-step, Series I A
RLS-unit, 2-step, Series II B
RLS-unit, 3-step, Series II D

PD 252 AAOZ

Operation on air failure

- A Stem retracted
- Z Stem extracted

Hand Wheel

- O without top, "light" - Type, for PD 252 and 502
- L top, "light" - Type, for PD 252 - 700
- H top, "heavy" - Type, for PD 252 - 700
- S lateral, for PD 1500 - 3000

Spring Range

		Actuator Size	Stroke
A	0,2 - 1,0	PD 252 - 700	20, 40
A	0,2 - 1,0	PD 1500	40
A	0,2 - 1,5	PD 1500 - 3000	80
G	0,4 - 1,2	PD 1500	40
G	0,4 - 1,7	PD 1500 - 3000	80
B	0,5 - 1,9	PD 252 - 700	20, 40
M	0,8 - 1,6	PD 1500 - 3000	20, 40
M	0,8 - 2,1	PD 1500 - 3000	80
D	1,0 - 1,8	PD 1500	20
D	1,0 - 2,4	PD 252 - 700	20, 40
N	1,2 - 2,0	PD 1500	40
N	1,2 - 2,5	PD 1500	80
E	1,3 - 2,6	PD 3000	80
E	1,3 - 2,0	PD 3000	40
U	1,5 - 2,3	PD 1500	40
V	1,5 - 2,7	PD 252 - 700	20, 40
U	1,5 - 3,8	PD 252 - 700	20, 40
J	1,8 - 2,7	PD 700	20
F	2,0 - 4,8	PD 252 - 700	20, 40
Q	2,2 - 3,8	PD 1500	80
Z	2,5 - 3,3	PD 1500	40

Actuator Colour

- A blue
- B white
- C yellow

Actuator Size with Standard Yoke

PD 252	Area 250 cm ²
PD 502	Area 500 cm ²
PD 700	Area 700 cm ²
PD 1500	Area 1500 cm ²
PD 3000	Area 3000 cm ²

ED 8/8 ZPO 50

Positioning Speed

13,5	13,5 mm/min
17	17 mm/min
25	25 mm/min
50	50 mm/min

Positioning Electronics

- O without Positioning Electronics, Input in mA
- M Positioning Electronics, Input in mA
- V Positioning Electronics, Input in V

Positioning Feedback

- O without 1000 Ω potentiometer
- P 1000 Ω potentiometer
- M 4 - 20 mA positioning feedback

Mains Power

- Z alternating current 230 V, 50 Hz
- D alternating current 400 V, 50 Hz
- G direct current 24 V

Haselhofer - Electric linear Actuator

ED 1,2/1,2	actuating power 1,2 kN
ED 4,5/2	actuating power 2 kN
ED 4,5/4,5	actuating power 4,5 kN
ED 8/6	actuating power 6 kN
ED 8/8	actuating power 8 kN
ED 12/12	actuating power 12 kN
ED 20/15	actuating power 15 kN
ED 20/20	actuating power 20 kN
ED 25/25	actuating power 25 kN

LD 16

Linear thrust Unit

LD 12	actuating power 10,4 kN
LD 16	actuating power 17,3 kN
LD 20	actuating power 27,7 kN

Regional Headquarters**Flowserve**

1350 N. Mt. Springs Prkwy.
Springville, UT 84663
USA

Telephone: +1 801 489 8611
Facsimile: +1 801 489 3719

Flowserve

Manderscheidstr. 19
45141 Essen
Germany

Telephone: +49 (0) 201 89195
Facsimile: +49 (0) 201 8919662

Flowserve

12 Tuas Avenue 20

Republic of Singapore 638824

Telephone: +65 862 3332
Facsimile: +65 862 4940

Main Sales Offices (Europe, Middle East, Africa)**Flowserve**

12, Av. du Québec
91965, Courtaboeuf Cedex
France

Telephone: +33 (0) 1 60 923 251
Facsimile: +33 (0) 1 60 923 299

Flowserve

Van Leeuwenhoekweg 6
3225 LX Hellevoetsluis
Netherlands

Telephone: +31 (0) 181 330044
Facsimile: +31 (0) 181 330040

Flowserve

Station Road
Perschore, Worcestershire
England WR102BZ

Telephone: +44 (0) 1386 554551
Facsimile: +44 (0) 1386 554968

Flowserve

Burrell Road
Hayward Heath, West Sussex
England

Telephone: +44 (0) 1444 314400
Facsimile: +44 (0) 1444 314401

Flowserve

Via Prealpi 30
20032 Cormanico (MI)
Italy

Telephone: +39 02 663251
Facsimile: +39 02 6151863

Flowserve

Allee du Quartz 1
2300 La-Chaux-de-Fonds
Switzerland

Telephone: +41 (0) 32 925 9700
Facsimile: +41 (0) 32 926 5422

Flowserve

Kasernengasse 6
9500 Villach
Austria

Telephone: +43 (0) 4242 41181-0
Facsimile: +43 (0) 4242 4118150

Flowserve

Units 1 and 2
26, Imvuba Road, Sebenza Ext 6
Edenvale, Gauteng
Edenglen 1613
South Africa

Telephone: +27 11 609 2094
Facsimile: +27 11 609 3735

Flowserve

c/o Saleh & Abdulaziz Abahsain
P.O. Box 209
Al Khobar 31952
Saudi Arabia

Telephone: 9663 857 3442
Facsimile: 9663 859 5284

™ indicates a trade mark of Schmidt Armaturen.

Information given in this leaflet is made in good faith and based upon specific testing but does not, however, constitute a guarantee.
Modifications without notice in line with technical progress.

**Schmidt Armaturen**

Zweigniederlassung der
Flowserve (Austria) GmbH

Kasernengasse 6
A-9500 Villach

Telephone: +43 (0) 4242 41181-0
Facsimile: +43 (0) 4242 41181-50 or 51

e-mail: schmidt@flowserve.com
www.schmidt.at

