
## Digital optical UV VIS spectral probe NitraVis<sup>®</sup> for nitrate and suspended solids


Sensor with integrated ultrasonic cleaning for the reagent-free measurement of nitrate and suspended solids (optional) - optimized for municipal wastewater treatment systems

We would like to inform you about the application range



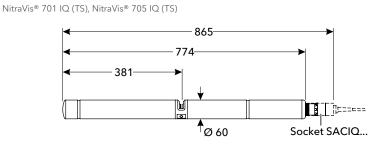

With shock protection:



## **Technical Data**

Model		NitraVis <sup>®</sup> 701 IQ	NitraVis <sup>®</sup> 705 IQ	NitraVis <sup>®</sup> 701 IQ TS	NitraVis <sup>®</sup> 705 IQ TS
Measuring method		Spectral Measurement in the UV-VIS Range (200-720 nm)			
<b>Measuring gap</b> (optical layer thickness)		1 mm	5 mm	1 mm	5 mm
Application (optimized for)		Municipal wastewater:	Municipal wastewater:	Municipal wastewater:	Municipal wastewater:
Measuring range and Resolution		Inlet:   0.0 300.0 mg/l 0.1 mg/l   0.00 60.00 mg/l 0.01 mg/l		<b>Inlet:</b> 0.0 300.0 mg/l 0.1 mg/l 0.00 60.00 mg/l 0.01 mg/l 0.00 15.00 g/l 0.01 g/l	
-		Aeration:   0.0 300.0 mg/l 0.1 mg/l   0.00 60.00 mg/l 0.01 mg/l		Aeration:   0.0 300.0 mg/l 0.1 mg/l   0.00 60.00 mg/l 0.01 mg/l   0.00 20.00 g/l 0.01 g/l	
	J	Effluent: 0.0 750.0 mg/l 0.1 mg/l 0.0 150.0 mg/l 0.1 mg/l	Effluent: 0.0 250.0 mg/l 0.1 mg/l 0.00 50.00 mg/l 0.01 mg/l	Effluent: 0.0 750.0 mg/l 0.1 mg/l 0.0 150.0 mg/l 0.1 mg/l 0 4,500 mg/l 1 mg/l	Effluent: 0.0 250.0 mg/l 0.1 mg/l 0.00 50.00 mg/l 0.01 mg/l 0.0 900.0 mg/l 0.1 mg/l
Flow rate		≤ 3 m/s			
Pressure Resistance		Maximum 1 bar (incl. sensor connection cable)			
Electrical connections		2-wire shield cable with quick fastener to sensor			
Electromagnetic Compatibility		EN 61326, Class B, FCC Class A Intended for indispensable operation			
Certifications		CE			
Mechanical		Housing: Titan Grade 2, PEEK Window: Sapphire glass Protection class: IP 68			
Weight (without cable)		Approx. 8.82 lb (4 kg)			
Warranty		2 years for defects in quality			
Model		Description			Order No.
NitraVis® 701 IQ		Spectral nitrate probe for the measurement in inlet/aeration with integrated ultrasonic cleaning, multifunctional slide and shock-absorption-rings, without connecting cable (order SACIQ separately)			
NitraVis® 705 IQ		Like NitraVis® 701 IQ, but for measuring in the outlet			
NitraVis <sup>®</sup> 701 IQ TS		Spectral nitrate and suspended solids probe for measuring in the inlet/aeration with integrated ultrasonic 481			

-=(wtw)=-

Like NitraVis® 701 IQ TS, but for measuring in the outlet

www.WTW.com

a **xylem** brand

NitraVis® 705 IQ TS

## Xylem Analytics Germany Sales GmbH & Co. KG, WTW Dr.-Karl-Slevogt-Straße 1 · D-82362 Weilheim · Germany · Phone: +49 881 1830 · Fax: +49 881 183-420 · Info.WTW@Xyleminc.com

481047

All names are registered tradenames or trademarks of Xylem Inc. or one of its subsidiaries. Technical changes reserved. © 2017 Xylem Analytics Germany Sales GmbH & Co. KG. 999233US

cleaning, multifunctional slide and shock-absorption-rings, without connecting cable (order SACIQ separately)