

RUBENS

NEEDLE-VALVES PN 400

The valves are of forged steel construction

MATERIAL:

Stainless steel Type 4607

Body. AISI 430F

Stem. AISI 420

Packing. Graphite

Handwheel. Steelplate


Stainless steel Type 4608

Body. AISI 316

Stem. AISI 329


Packing. Graphite

Handwheel. Steelplate

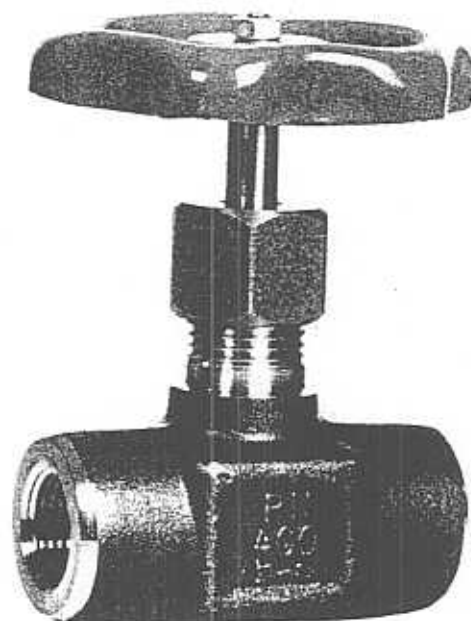

Pressure	400	160	125	20	bar
Temp	20	125	200	300	C ^o

Tested for 600 bar

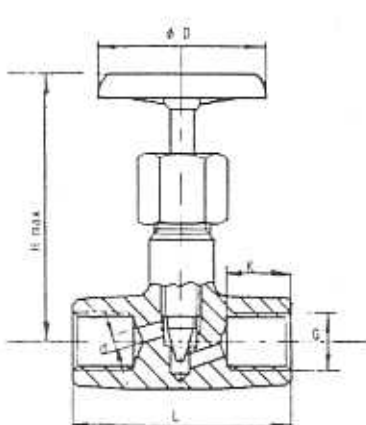	Size		K	d	L	D	H max	Weight kg	Kv. values
	DN	in							
	6	1/8	12	4	60	65	85	0,42	0,30
	8	1/4	14	5	60	65	85	0,40	0,42
	10	3/8	15	5	60	65	85	0,38	0,48
	15	1/2	16	5	60	65	85	0,34	0,54
	20	3/4	18	8	70	85	100	0,90	1,20
	25	1	20	10	78	100	110	1,05	1,45

- The valve can be supplied with locked boxnut.
- **Connections:** Type 4607, BSP female and male threads, NPT.
Type 4608, BSP female and male threads, NPT, socket or butt weld.
- These valves are suitable for steam, oil and gas. They are also available for a wide range of acid and alkaline fluids in chemical and processing industries.

F FAGERBERG

Gustaf Fagerberg A/S
Kornmarksvej 8-10
2605 Brøndby
E-mail: fagerberg@fagerberg.dk
Homepage: www.fagerberg.dk

Telefon: 43 29 02 00
Telefax: 43 29 02 02