

HIGH PERFORMANCE BUTTERFLY VALVE

Butterfly valve double offset design | type HG

Advantages

Reliable sealing against high pressures and low torques due to the double offset design


Low-wear switching characteristics

Secure stem sealing (Option: TA-Luft)

Variable seat ring materials

GEFA-MULTITOP Efficient automation with variable interface without interruption of the stem


Pivoting angle limitation and optical position indicator at the stem prevents wrong position of the stem during servicing

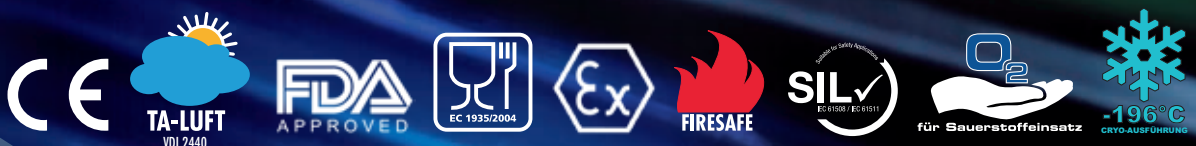

TECHNICAL FEATURES

Butterfly valve double offset design | type HG

Efficient and safe automation with the interchangeable flange GEFA-MULTITOP

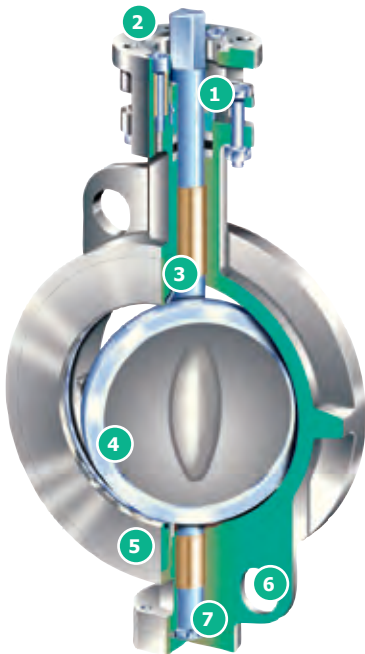

1 Automation

- Standard mounting flange according to EN ISO 5211
- Direct actuator mounting without interruption of the stem
- Variable and exchangeable for any actuator size
- Actuator protection against leakage

2 Safety (option: TA-Luft)

Stem sealing can be re-tensioned beneath the mounting flange; thus, it can be readjusted without dismantling the actuator.

3 Long service life

The insert ring of the body efficiently protects the seat ring from the direct medium flow and prevents wear such as erosion and abrasion.

4 Reliability

The double offset design with spherical sealing surface at the disc allows switching with minimum wear and offers the highest level of tightness and low torques at the same time.

5 Exact and variable

Face-to-face dimension: EN 558 line 20/25/16
Option: Design with groove / spring EN 1092, form D

6 Precise mounting

Easy mounting due to centring aids for all standard flanges.

7 Service-friendly


The axial centring of the stem can be reached easily and is prepared for later service.

8 Efficient and safe

The cylindrical screws fix the mounting flange without transferring torques (driving torques).

9

The clamping sleeves guarantee a clearance-free connection between the mounting flange and the body and transfer the driving torques.

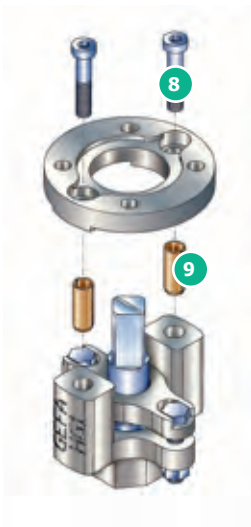

THE TYPES

Butterfly valve double offset design | type HG



Type HG 1 DN 50 – DN 600

Double offset valve as wafer type butterfly valve for high pressure and temperature loads

Wafer style

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range

-50 °C to + 450 °C
Vacuum: up to 1 mbar (abs)

Face-to-face dimension

DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000

Type HG 7 DN 50 – DN 600

Double offset valve with lugs for high pressure and temperature loads

Can be removed from the flange on one side

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range

-50 °C to + 450 °C
Vacuum: up to 1 mbar (abs)

Face-to-face dimension

DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000

Type HG 7 ...BK DN 50 – DN 600

Double offset valve with lugs for high pressure and temperature loads

Can be removed from the flange on both sides

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range

-50 °C to + 450 °C
Vacuum: up to 1 mbar (abs)

Face-to-face dimension

DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000

Type HGF DN 50 – DN 600 FireSafe version

Double offset valve for the use in the FireSafe area according to DIN EN ISO 10497, API 607 und BS 6755 Part 2

Wafer or lug style

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range

-50 °C to + 450 °C

Face-to-face dimension

DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange

DIN EN ISO 5211

Test

DIN EN 12266 P10 P11 P12 F20

Marking

DIN EN 19, AD 2000



Type HGC
DN 50 – DN 600
Cryo version

Double offset valve for the use down to -200 °C with cryogenic stem extension as pressure chamber

Wafer or lug style

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 10 ASME CI 150/300, PS25

Temperature range
-200 °C to +200 °C

Face-to-face dimension
DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10 P11 P12 F20

Marking
DIN EN 19, AD 2000



Type HGH
DN 50 – DN 600
Valve with heating jacket

Double offset valve with heating jacket with two chambers connections: flange, welding socket, threaded socket

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range
-50 °C to +450 °C

Face-to-face dimension
DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10 P11 P12 F20

Marking
DIN EN 19, AD 2000



Type HGHL
DN 50 – DN 600
Welded valve

Double offset valve with double shell for heating without interruption of the pipeline heating.

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range
-50 °C to +450 °C

Face-to-face dimension
according to customer specifications

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10 P11 P12 F20

Marking
DIN EN 19, AD 2000



Type HG1 / 7 L
DN 50 – DN 600
Food

Double offset valve for the use in the food industry according to the regulation EC1935/2004

Technical Data

For installation between flanges EN 1092, PN 10/16/25/40, PS 25 ASME CI 150/300, PS25

Temperature range
-20 °C to +200 °C

Vacuum: up to 1 mbar (abs)
Face-to-face dimension
DIN EN 558 line 20
Optional: line 25 and line 16
API 609 table 1

Mounting flange
DIN EN ISO 5211

Test
DIN EN 12266 P10 P11 P12 F20

Marking
DIN EN 19, AD 2000
VO (EG) 1935/2004

DETAILED SOLUTIONS

Butterfly valve double offset design | type HG


The seat ring system

Highly flexible with optimised restoring force

If it is installed in the recommended flow direction, the differential pressure efficiently supports the bubble-tight sealing


Options

- Low temperature seat ring
- Seat ring made of high performance plastics for extreme cases of application

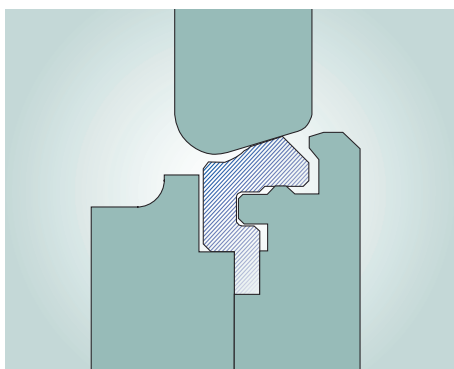


R-PTFE seat ring

Highly flexible design – chemically almost unlimited resistant. Pressure-resistant due to glass fibre reinforcement even at high temperatures. Tightness EN12266, leakage rate A.

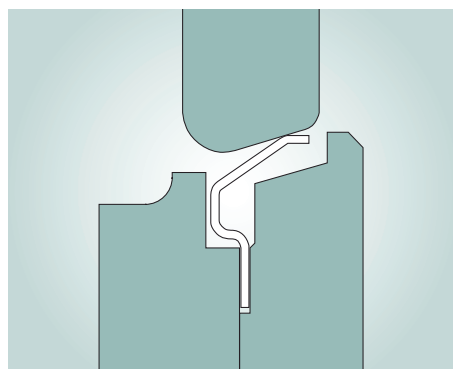

Metal seat ring

Excellent spring characteristics due to the special form. High temperature-resistant due to the seat ring construction of: 1.4571 nitrated, tightness up to + 450 °C, EN12266, leakage rate B.

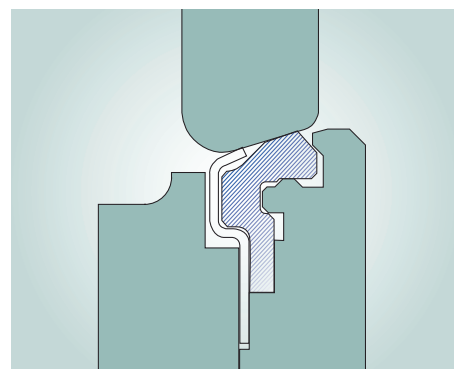

Firesafe seat ring

Double seat PTFE/1.4571 certified according to EN ISO 10497:2010-06 API607, 6th edition.


The double offset design

The double offset design allows a reliable, almost wear-free shut-off. Due to the double displacement of the pivot, the valve disc is lifted from the seat at the beginning of the opening movement. The seat is then free from heavy pressure over the whole circumference.

The 90 ° turning is frictionless at even reduced torques.

These design characteristics allow an extremely long functional life – even at high switching frequencies. The recommended pressure direction (arrow mark at the body) ensures complete tightness.




The active pressure (differential pressure) of the medium additionally supports the sealing function via the pressing effect of the seat ring against the sealing surface of the disc. The insert ring and the body additionally protect the flexible seat ring efficiently against negative flow influences.

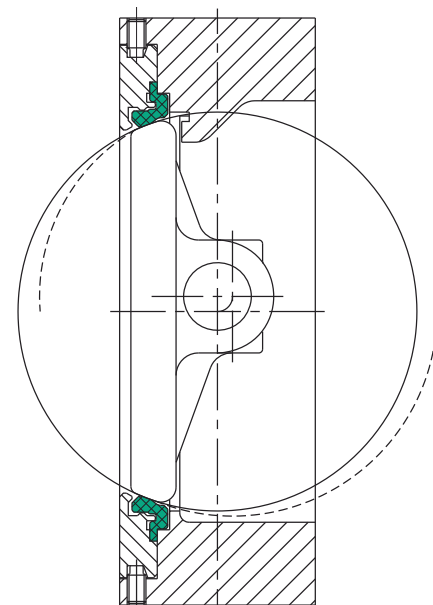

TECHNICAL DATA

Butterfly valve double offset design | type HG

Pressure and temperature range diagram

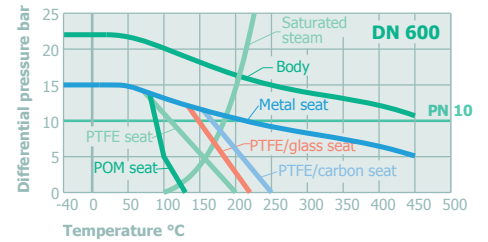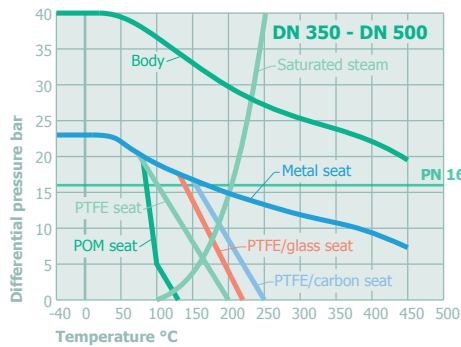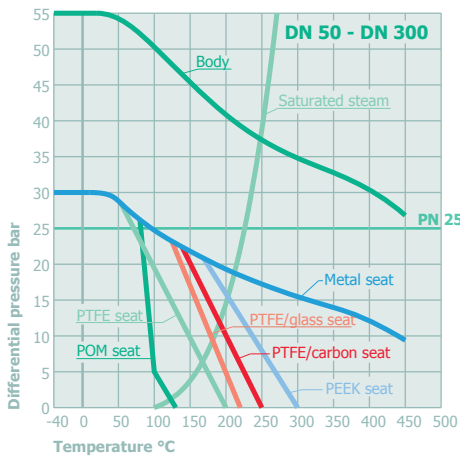

Control range

20° – 60° opening angle

Vacuum-tight

up to 1 mbar (a)

Flange surfaces

according to DIN EN 1092-1 form B1

The pressure and temperature range diagram shows the application limits of the different seat ring materials. These limits apply to the intended use. Process variables and characteristics of the medium can influence the values of the diagram. Temperatures below -50 °C upon request.

| Nominal size | Nominal pressure | max. operating pressure |
|------------------|--------------------------------|-------------------------|
| DN 50 – DN 300 | PN 10/16/25/40 ANSI 150/300 | 25 bar |
| DN 350 – DN 500 | PN 10/16/25 ANSI 150 | 16 bar |
| DN 600 – DN 1000 | PN 10/16 ANSI 150 | 10 bar |

The maximum operating pressure depends on the operating temperature.

Available materials

| Position | Designation | Material | | | | | | | |
|----------|------------------------------------|------------------------------------|--------------------------|---|--|---|--|---|---------------------------------------|
| | | ≤ DN 300 ≥ DN 350 | HG 4466 TG HG 4444 TG | HG 6666 TG | HG 4435 M HG 4444 M | HG 6635 M | HG 4435 HM HG 4444 HM | HG 6635 HM | HGF 4466 TM |
| | max. operating temp. | +220 °C | +220 °C | +220 °C | +220 °C | +450 °C | +450 °C | +200 °C | +200 °C |
| 1 | Body | 1.0619 | 1.4408 | 1.0619 | 1.4408 | 1.0619 | 1.4408 | 1.0619 | 1.4408 |
| 2 | Valve disc ≤ DN 300 ≥ DN 350 | 1.4408 1.0619/ nickel-plated | 1.4408 1.4408 | 1.4408/ nitrated 1.0619/ nickel-plated | 1.4408/ nitrated 1.4408/ nitrated | 1.4408/ nitrated 1.0619/ nickel-plated | 1.4408/ nitrated 1.4408/ nitrated | 1.4408/ nitrated 1.0619/ nickel-plated | 1.4408 1.4408 |
| 3 | Welle | 1.4571 | 1.4571 | 1.4571 | 1.4571 | 1.4571 | 1.4571 | 1.4571 | 1.4571 |
| 4* | Seat ring | PTFE/Glas | PTFE/Glas | 1.4571/ nitrated/ Graphite** | 1.4571/ nitrated/ Graphite** | 1.4571/ nitrated/ Graphite** | 1.4571/ nitrated/ Graphite** | PTFE/1.4571/ nitrated+ Graphite | PTFE/1.4571/ nitrated+ Graphite |
| 5 | Bearing bush | 1.4401/PTFE | 1.4401/PTFE | 1.4401/PTFE | 1.4401/PTFE | 1.4571/nitrated | 1.4571/nitrated | 1.4571/nitrated | 1.4571/nitrated |
| 6* | Package | PTFE | PTFE | PTFE | PTFE | Graphite | Graphite | Graphite | Graphite |
| 7 | Insert ring | C-steel | 1.4571 | C-steel | 1.4571 | C-steel | 1.4571 | 1.4571 | 1.4571 |

* Spare part/wear part, **Option: 1.4571/nitrated/PTFE