






# VALVE HEAD I40 TYPE Q

ART. NO. 310043

## GENERAL

-  The KEOFIT CLASSIC "INGOLD" Sampling Valve owes its hygienic design and one-piece construction to the original KEOFIT valve. Unique serial no. for each valve\*.
-  The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.
-  Cleaning/sterilizing: Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. Between samples: Valve in its normal closed position: cleanable by CIP as "Between batches" or the valve may be sterilized by means of steam SIP or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact Keofitt. Autoclavable.
-  Designed for sampling of liquids with a viscosity of up to approx. 1.000 cP containing no particles larger than Ø2 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).



## FEATURES

-  Installation: Threaded connection (I40)
-  Operation: Lever handle (#600170)
-  Membrane: Silicone (#310051)

## CERTIFICATION\*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · ATEX 2014/34/EU
- PED 2014/68/EU · FDA CFR 21 §177.2600 · USP Class VI · Keofitt DoC

## TECHNICAL DATA

### Material (process contact)

- Membrane SILICONE, GREY (#310051)

### Material (without process contact)

- Steel parts AISI 303 (1.4305) / AISI 316L (1.4404)
- Lever handle AISI 316L (1.4404)

### Membrane

- Article SILICONE, GREY (#310051)
- Certification\*
  - EU EC 1935/2004 · EU EC 2023/2006
  - DK No. 1248 10/2018 · FDA CFR 21 §177.2600 · USP Class VI
  - REACH · RoHS · ADI Free · Keofitt DoC

### Pressure & Temperature



- Pressure 0 - 10 bar / 0 - 145 psi
- Temperature 1 - 130°C / 34 - 266°F
- Air supply -

### Net Weight

- kg/lbs 0.365 kg/0.803 lbs





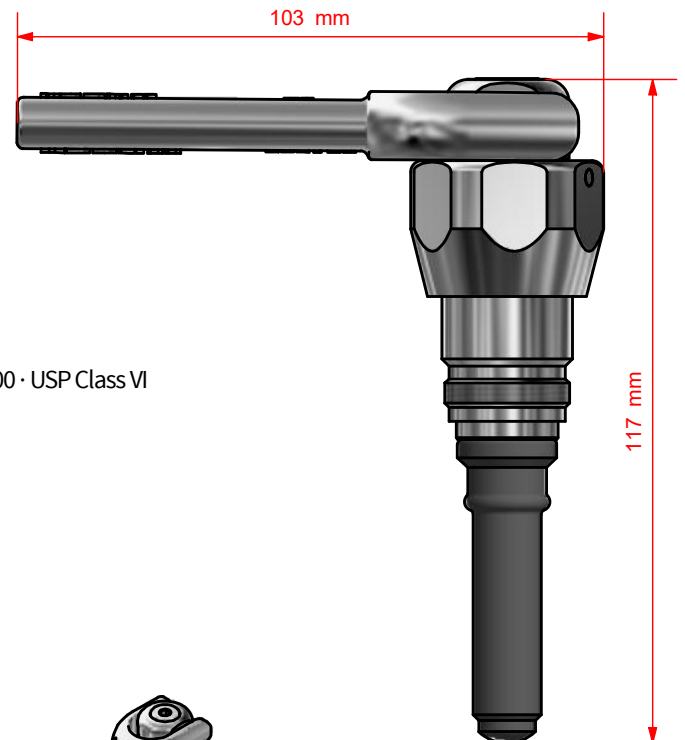

### Spareparts

- 773141 PARTS FOR I40 HEAD 310041/43








\*For further information and download please visit [www.keofitt.dk](http://www.keofitt.dk)

KEOFITT CLASSIC “INGOLD” SAMPLING VALVE - BODIES

INGOLD BODIES		
	STANDARD FOR 40 MM PORT LENGTH*	
HOSE PIECE	 On request	 On request
MINI TRI-CLAMP	 310002	 310005
WELDING LINER	 On request	 On request

\* OTHER PORT LENGTH - AVAILABLE ON REQUEST

STANDARD FOR 52 MM PORT LENGTH*		
 On request	 320002	 320005
 On request		 320007

\* OTHER PORT LENGTH - AVAILABLE ON REQUEST

