


# VALVE BODY W25 TYPE T

ART. NO. 870001

## GENERAL

- The KEOFIT CLASSIC W25 Sampling Valve is the largest KEOFIT sterilizable sampling valve. Designed for very high viscosity sampling. Unique serial no. for each valve\*.
- The sampling valve can be used for any process sampling for microbiological, chemical and/or physical analysis.
- Cleaning/sterilizing: Between batches: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. Between samples: Valve in its normal closed position: cleanable by CIP as "Between batches" or the valve may be sterilized by means of steam SIP or chemical SIP using a procedure appropriate to the actual circumstances. For further advice, please contact Keofitt.
- Designed for sampling of liquids with a viscosity of up to approx. 250.000 cP containing no particles larger than Ø17 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).



## FEATURES

- Installation: Tank welding
- Operation: Depending on choice of valve head
- Inlet / Outlet: 1 1/2" Clamp DIN 32676:2009-05 Table 4 Row C
- Membrane: Depending on choice of valve head

## CERTIFICATION\*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · 3.1 Material Certificate · Ra Certificate
- ATEX 2014/34/EU · PED 2014/68/EU · Keofitt DoC

## TECHNICAL DATA

### Material (process contact)

- Steel parts      AISI 316L (1.4404)

### Material (without process contact)

- Steel parts      AISI 304 (1.4301)

### Surface Treatment

- Outside      Electropolished Ra ≤ 1.2 µm
- Inside (wetted surface)      Electropolished Ra ≤ 0.8 µm
- Process connection      Electropolished Ra ≤ 0.8 µm

### Pressure & Temperature



- Pressure      Depending on choice of valve head
- Temperature      Depending on choice of valve head
- Air supply      Depending on choice of valve head

### Net Weight

- kg/lbs      8.783 kg/19.347 lbs

### Spareparts

- NOT APPLICABLE

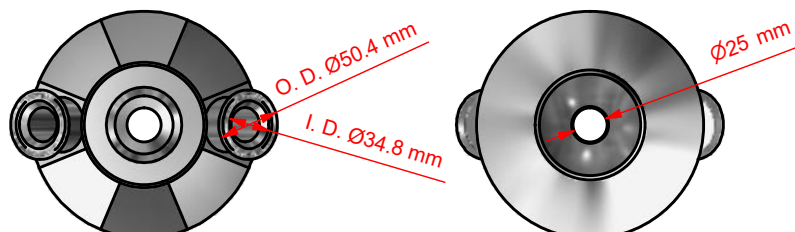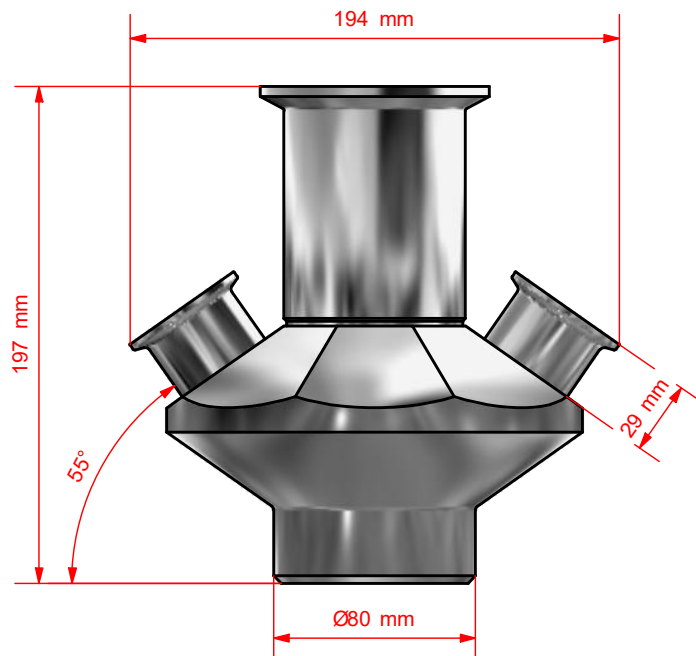


\*For further information and download please visit [www.keofitt.dk](http://www.keofitt.dk)

KEOFITT CLASSIC W25 SAMPLING VALVE - HEADS

W25 HEADS	
	PTFE
TYPE N LEVER HANDLE PNEUMATIC	 875544

-50-

IV >

TYPE B NO SPRING 0-12 BAR	 875547
---------------------------------	----------------------------------------------------------------------------------------------

-51-

IV >

