

VALVE BODY W9 TYPE P OUTLET ONLY

ART. NO. 850011-1

GENERAL

- The modified version of KEOFIT CLASSIC W9 Sampling Valve is a CIP-able sampling valve for less demanding applications. Replaces non-hygienic sampling cocks/valves. Unique serial no. for each valve*.
- The sampling valve can be used for any process sampling for chemical and/or physical analysis.
- Cleaning: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. For further advice, please contact Keofitt.
- Designed for sampling of liquids with a viscosity of up to approx. 1.000 cP containing no particles larger than Ø3 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).



FEATURES

- Installation: Pipe welding
- Operation: Depending on choice of valve head
- Outlet: Hose piece
- Membrane: Depending on choice of valve head

CERTIFICATION*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · 3-A Certificate · 3.1 Material Certificate · Ra Certificate
- ATEX 2014/34/EU · PED 2014/68/EU · Keofitt DoC

TECHNICAL DATA

Material (process contact)

- Steel parts AISI 316L (1.4404)

Material (without process contact)

- Steel parts AISI 316L (1.4404)
- Rubber cap EPDM (black)
- Stainless steel chain AISI 316L (1.4404)

Surface Treatment

- Outside Electropolished $Ra \leq 1.2 \mu m$
- Inside (wetted surface) Electropolished $Ra \leq 0.5 \mu m$
- Process connection Electropolished $Ra \leq 0.5 \mu m$

Pressure & Temperature




- Pressure Depending on choice of valve head
- Temperature Depending on choice of valve head
- Air supply Depending on choice of valve head

Net Weight

- kg/lbs 0.3 kg/0.662 lbs





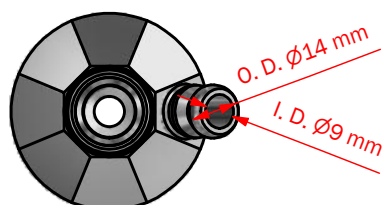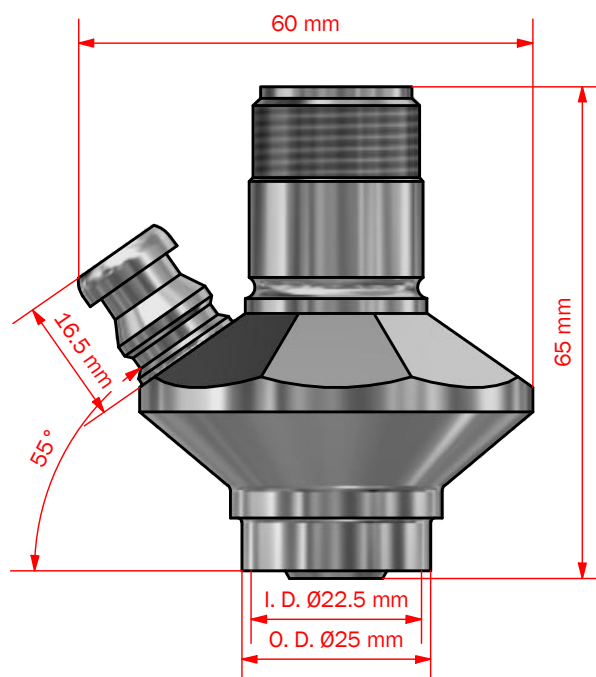



























Spareparts

- NOT APPLICABLE



*For further information and download please visit www.keofitt.dk

KEOFITT CLASSIC W9 SAMPLING VALVE - HEADS

| W9 HEADS | | | | | | | | |
|----------|---|--|---|--|--|---|---|---|
| | Type H Turn knob | Type H Turn knob with Microport option | Type K Key ring | Type K Key ring with Microport option | Type Q Lever handle | Type N Pneumatic 0-6 bar | Type N Pneumatic, Adjustable 0-6 bar | Type B No spring 0-12 bar(g) |
| Silicone |  600041 |  600048 |  600042 |  600049 |  600043 |  600044 |  600045 |  600047 |
| EPDM |  600041E |  600048E |  600042E |  600049E |  600043E |  600044E |  600045E |  600047E |
| FFKM |  600041F |  Not available |  600042F |  Not available |  600043F |  600044F |  600045F |  600047F |
| PTFE |  855541 |  Not available |  855542 |  Not available |  855543 |  855544 |  855545 |  855547 |