

# VALVE BODY W9 MINI TRI-CLAMP OUTLET ONLY

ART. NO. 850036-1

## GENERAL

- The modified version of KEOFIT CLASSIC W9 Sampling Valve is a CIP-able sampling valve for less demanding applications. Replaces non-hygienic sampling cocks/valves. Unique serial no. for each valve\*.
- The sampling valve can be used for any process sampling for chemical and/or physical analysis.
- Cleaning: Valve in open position: Cleanable by means of CIP using the detergent solution suitable for the actual process media. For further advice, please contact Keofitt.
- Designed for sampling of liquids with a viscosity of up to approx. 1.000 cP containing no particles larger than Ø3 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).



## FEATURES

- Installation: 1/2" Clamp DIN 32676:2009-05 Table 4 Row C
- Operation: Depending on choice of valve head
- Outlet: Hose piece
- Membrane: Depending on choice of valve head

## CERTIFICATION\*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · 3-A Certificate · 3.1 Material Certificate · Ra Certificate
- ATEX 2014/34/EU · PED 2014/68/EU · Keofitt DoC

## TECHNICAL DATA

### Material (process contact)

- Steel parts AISI 316L (1.4404)

### Material (without process contact)

- Steel parts AISI 316L (1.4404)
- Rubber cap EPDM (black)
- Stainless steel chain AISI 316L (1.4404)

### Surface Treatment

- Outside Electropolished Ra ≤ 1.2 µm
- Inside (wetted surface) Electropolished Ra ≤ 0.5 µm
- Process connection Electropolished Ra ≤ 0.5 µm

### Pressure & Temperature




- Pressure Depending on choice of valve head
- Temperature Depending on choice of valve head
- Air supply Depending on choice of valve head

### Net Weight

- kg/lbs 0.307 kg/0.676 lbs





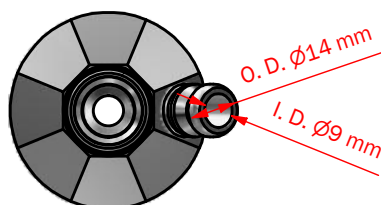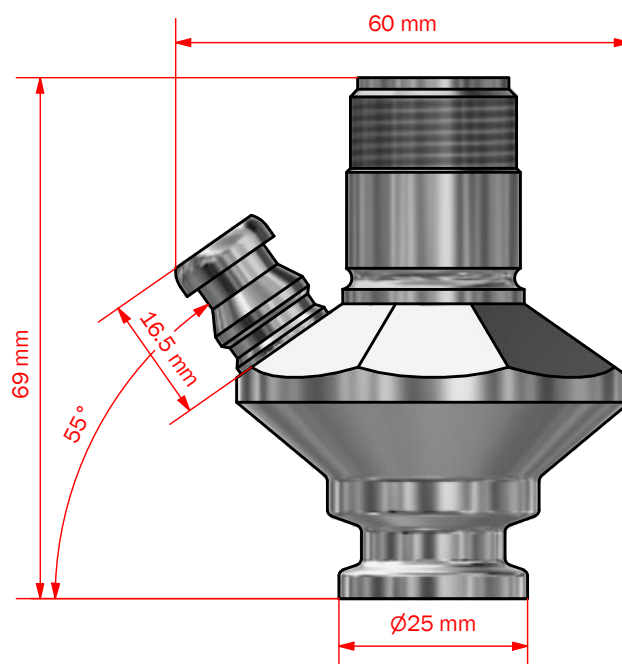







### Spareparts

















- NOT APPLICABLE



\*For further information and download please visit [www.keofitt.dk](http://www.keofitt.dk)

KEOFITT CLASSIC W9 SAMPLING VALVE - HEADS

W9 HEADS				
	SILICONE	EPDM	FFKM	PTFE
TYPE H TURN KNOB 0-10 BAR (FFKM 0-5 BAR)	 600041	 600041E	 600041F	 855541
TYPE H TURN KNOB W/ MICROPORT 0-10 BAR	 600048	 600048E	Not available	
TYPE K KEY RING 0-10 BAR (FFKM 0-5 BAR)	 600042	 600042E	 600042F	 855542
TYPE K KEY RING W/OPT. MICROPORT 0-10 BAR	 600049	 600049E	Not available	

TYPE Q LEVER HANDLE 0-10 BAR (FFKM 0-6 BAR)	TYPE N PNEUMATIC 0-10 BAR (FFKM 0-6 BAR)	TYPE N PNEUMATIC, ADJUSTABLE 0-10 BAR (FFKM 0-6 BAR)	TYPE B NO SPRING 0-12 BAR(G)
 600043	 600044	 600045	 600047
 600043E	 600044E	 600045E	 600047E
 600043F	 600044F	 600045F	 600047F
 855543	 855544	 855545	 855547

