


CARLSBERG FLASK 25 l

ART. No. 210001

GENERAL

- The KEOFIT CARLSBERG FLASK is used for the propagation of yeast cultures in a sterile environment and the transfer of the pure yeast culture under sterile conditions ensuring contamination-free culture development.
- Can be placed directly on heating plate.
- Maximum capacity 80% of volume.
- Valve W9:**
Designed for sampling of liquids with a viscosity of up to approx. 1.000 cP containing no particles larger than Ø3 mm. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).
- Micro Port:**
Designed for sampling of liquids with a viscosity of up to approx. 50 cP containing no particles larger than Ø0.8 mm.

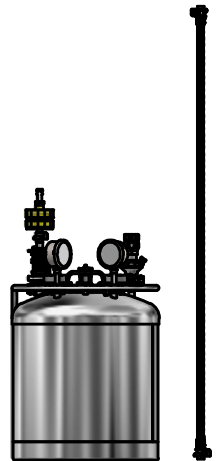

FEATURES

- Valve W9 (Body #850036 / Head #210041)
- Bung Valve for pressure relief (#210039)
- Micro Port (#900059)
- Thermometer (#210102) and Manometer (#210103)

CERTIFICATION*

- EU EC 1935/2004 · EU EC 2023/2006 · DK No. 1248 10/2018 · 3.1 Material Certificate · PED 2014/68/EU
- FDA CFR 21 §177.2600 · USP Class VI · ADI Free · Keofitt DoC

TECHNICAL DATA

Material (process contact)

- Membrane SILICONE, grey (#600051)
- Septum Butyl IIR (B4002F - grey, #900049)
- Steel parts AISI 316L (1.4404)
- Gasket EPDM, black (#900074)
- O-ring Silicone, red (#210830)
- PTFE Tubing (1 m) PTFE Tubing w/Quick Coupling (#215503)

Surface Treatment

- Inside (wetted surface) Ra ≤ 0.8 µm

Pressure & Temperature



- Pressure 0 - 1.5 bar / 0 - 21.8 psi
- Temperature < 110°C / < 230° F
- Air supply -

Net Weight

- kg/lbs Approx. 20 kg / 44 lbs

Spareparts

- 772101 PARTS FOR CARLSBERG FLASK

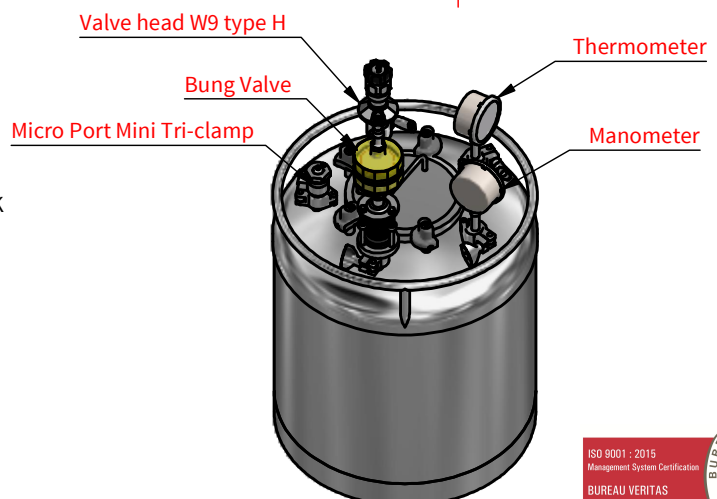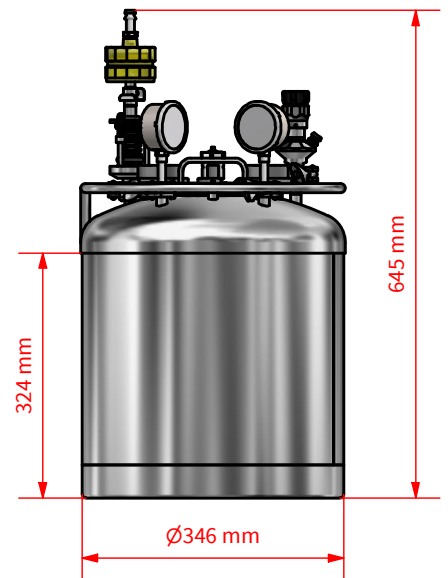

*For further information and download please visit www.keofitt.dk