



KIESELMANN


FLUID PROCESS GROUP

Translation of the original

Operating instruction



Single Stage Control Valves

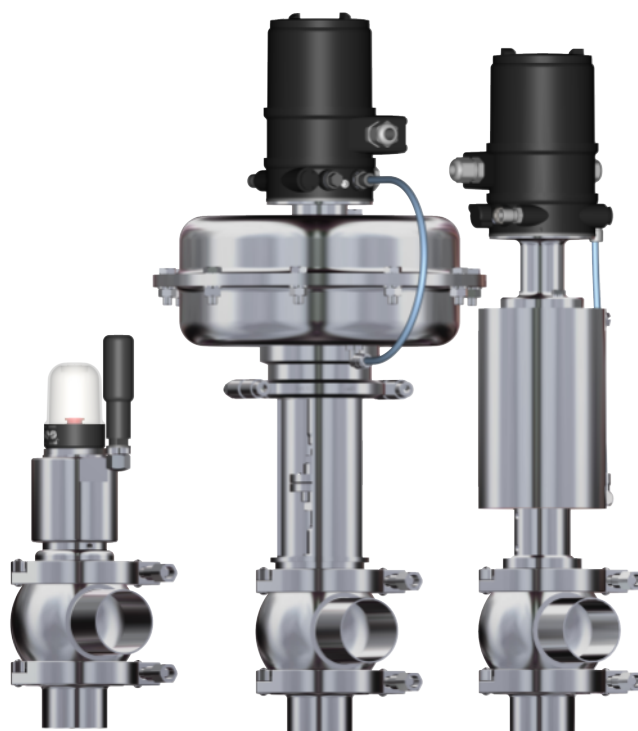Type 91xx



KIESELMANN GmbH

Paul-Kieselmann-Str. 4-10
D - 75438 Knittlingen

 +49(0) 7043 371-0 •  +49(0) 7043 371-125
www.kieselmann.de • info@kieselmann.de

Copyright: © KIESELMANN FLUID PROCESS GROUP

Table of contents

1 General informations	4
1.1 Informations for your safety	4
1.2 Marking of security instructions	4
1.3 General designated use	4
1.4 Personnel	4
1.5 Modifications, spare parts, accessories	5
1.6 General instructions	5
2 Safety instructions	6
2.1 Intended use	6
2.2 General notes	6
2.3 General safety instructions	6
3 Delivery, transport and storage	8
3.1 Delivery	8
3.2 Transport	8
3.3 Storage	8
4 Specification	9
4.1 Valve types	9
5 Function and operation	10
5.1 Description of function	10
5.2 Valve basic position:	11
6 Commissioning, service and maintenance	12
6.1 Commissioning	12
6.1.1 Installation instructions	12
6.1.2 General welding guidelines	12
6.1.3 ATEX - Guidelines	12
6.2 Service	13
6.3 Cleaning	13
7 Technical data	14
7.1 Control valve Type 91xx	14
7.2 Identification	14
7.3 Torques	14
7.4 KV - value	15
8 Disassembly and assembly	16
8.1 Disassembly	16
8.1.1 Removing wearing parts - Valve with manual actuator	17
8.1.2 Removing wearing parts - Valve with manual actuator	19
8.1.3 Removing wearing parts - Valve with diaphragm actuator	22
8.1.4 Removing Interchangeable seat	24
8.2 Assembly	25
9 Mounting kit for positioner	26
9.1 Bürkert positioner Type 8692, 8694	26
9.2 Guth Positioner DIGIPOS	28
10 Drawings and dimensions	30
10.1 Drawings	30
10.2 Dimensions	33
11 Wearing parts	35
11.1 Overview - Seal and wearing parts kits	35
12 Classification	39
12.1 Structure of Order Number	39
13 Appendix	44
13.1 Declaration of incorporation	44

1 General informations

1.1 Informations for your safety

We are pleased that you have decided for a high-class KIESELMANN product. With correct application and adequate maintenance, our products provide long time and reliable operation.






Before installation and initiation, please carefully read this instruction manual and the security advices contained in it. This guarantees reliable and safe operation of this product and your plant respectively. Please note that an incorrect application of the process components may lead to great material damages and personal injury.

In case of damages caused by non observance of this instruction manual, incorrect initiation, handling or external interference, guarantee and warranty will lapse!

Our products are produced, mounted and tested with high diligence. However, if there is still a reason for complaint, we will naturally try to give you entire satisfaction within the scope of our warranty. We will be at your disposal also after expiration of the warranty. In addition, you will also find all necessary instructions and spare part data for maintenance in this instruction manual. If you don't want to carry out the maintenance by yourself, our KIESELMANN - service team will naturally be at your disposal.

1.2 Marking of security instructions

Hints are available in the chapter "safety instructions" or directly before the respective operation instruction. The hints are highlighted with a danger symbol and a signal word. Texts beside these symbols have to be read and adhered to by all means. Please continue with the text and with the handling at the valve only afterwards.

Symbol	Signal word	Meaning
	DANGER	Imminent danger which will result severe personal injury or death.
	WARNING	Imminent danger which may result severe personal injury or death.
	CAUTION	Dangerous situation which may cause slight personal injury or material damages.
	NOTICE	An harmful situation which may result in damages of the product itself or of adjacent vicinity.
	INFORMATION	Marks application hints and other information which is particularly useful.

1.3 General designated use

The fitting is designed exclusively for the purposes described below. Using the fitting for purposes other than those mentioned is considered contrary to its designated use. KIESELMANN cannot be held liable for any damage resulting from such use. The risk of such misuse lies entirely with the user. The prerequisite for the reliable and safe operation of the fitting is proper transportation and storage as well as competent installation and assembly. Operating the fitting within the limits of its designated use also involves observing the operating, inspection and maintenance instructions.

1.4 Personnel

Personnel entrusted with the operation and maintenance of the tank safety system must have the suitable qualification to carry out their tasks. They must be informed about possible dangers and must understand and observe the safety instructions given in the relevant manual. Only allow qualified personnel to make electrical connections.

1.5 Modifications, spare parts, accessories

Unauthorized modifications, additions or conversions which affect the safety of the fitting are not permitted. Safety devices must not be bypassed, removed or made inactive. Only use original spare parts and accessories recommended by the manufacturer.

1.6 General instructions

The user is obliged to operate the fitting only when it is in good working order. In addition to the instructions given in the operating manual, please observe the relevant accident prevention regulations, generally accepted safety regulations, regulations effective in the country of installation, working and safety instructions effective in the user's plant.

2 Safety instructions

2.1 Intended use

The control valve is used for the regulation of media in the food and beverage industry, in pharmaceutical and chemical engineering, as well as in bio-engineering.

2.2 General notes



NOTICE - observe the operating instructions

To avoid danger and damage, the fitting must be used in accordance with the safety instructions and technical data contained in the operating instructions.



NOTICE

All data are in line with the current state of development. Subject to change as a result of technical progress.

2.3 General safety instructions



⚠ WARNING

Risk of injury by moving parts

Do not grab into the valve when the actuator is pressurized. Limbs can be crushing or amputating.

- Remove the control air line before dismantling.
- Ensure that the actuator is unpressurized.



⚠ WARNING

Risk of injury by outflowing medium

Dismantling the valve or valve assemblies from the plant can cause injuries.

- Medias flowing through the leakage drain outlet are to be drained off without splashing into a discharge arrangement.
- Carry the disassembling only if when the plant has been rendered pressure-less and free of liquid and gas.



⚠ WARNING

Risk of injury by moving parts

When dismount the clamp coupling, the spring preloaded valve insert (air open - spring close) may incur serious injuries by jumping out of the housing.

- First pneumatically open the valve before disassembling the clamp coupling, so that up-stroke the piston.
- Remove the valve core.
- Remove the control air line at valve insert.

⇒ Ensure that the actuator is unpressurized.



⚠ WARNING

ATEX - Guidelines

If the valve or the plant is operated in a potentially explosive atmosphere, the valid ATEX directive of the EC and the installation instructions in this operating manual must be observed.

**⚠ CAUTION**

When mounting the clamps, the max. torque must not be exceeded.
(see technical data)

**⚠ CAUTION**

To avoid air leaking, only use pneumatic connection parts that have an O-ring seal facing the even surface.

**⚠ CAUTION**

Before starting the system, the entire pipeline system must be thoroughly cleaned.

**⚠ CAUTION**

Steps should be taken to ensure that no external forces are exerted on the fitting.

3 Delivery, transport and storage

3.1 Delivery

- Immediately after receipt check the delivery for completeness and transport damages.
- Remove the packaging from the product.
- Retain packaging material, or expose of according to local regulations.

3.2 Transport



CAUTION

Risk of injury and damage to the product

During the transport the generally acknowledged rules of technology, the national accident prevention regulations and company internal work and safety regulations must be observed.

3.3 Storage



NOTICE

Damage to the product due to improper storage!

Observe storage instructions
avoid a prolonged storage



INFORMATION

Recommendation for longer storage

We recommend regularly checking the product and the prevailing storage conditions during long storage times.

- To avoid damage to seals and bearings,
 - products up to DN 125 / OD 5 inch should be stored horizontally for maximum 6 months.
 - products larger than DN 125 / 5 inch, should be stored in the upright position with the actuator on top.
- Don't store any objects on the products.
- Protect the products for wetness, dust and dirt.
- The product should be stored in a dry and well ventilated room at a constant temperature (optimal indoor temperature: 25 °C ±5 ; indoor humidity data 70% ±5%).
- Protect seals, bearings and plastic parts for UV light and ozone.

4 Specification

4.1 Valve types

Kind of actuator	positioner		Housing type	Sealing ma- terial ¹	Nominal diameter	KV - value
Manual operation	A	-	- Angle (S-S) - T (SS-S) - Inclined (S-S)	- EPDM - HNBR - FKM - metallic	DN25 - DN125 OD 1 Inch - OD 5 Inch	0.2 m³/h - 160 m³/h
- pneum. Linear actu- ator	B	- GUTH DigiPos	- Angle (S-S)	- EPDM		
	C	- Bürkert 869x	- T (SS-S)	- HNBR		
			- Inclined (S-S)	- FKM - metallic		
- pneum. Diaphragm actuator	D	- Bürkert 879x	- Angle (S-S)	- EPDM		
	E	- Samson	- T (SS-S)	- HNBR		
	F	- GUTH DigiPos	- Inclined (S-S)	- FKM		
	G	- Bürkert 869x		- metallic		


1. Control valve with elastomeric or metallic sealing at the flow cone

Control valve with


Manual operation

Piston Actuator

Diaphragm Actuator

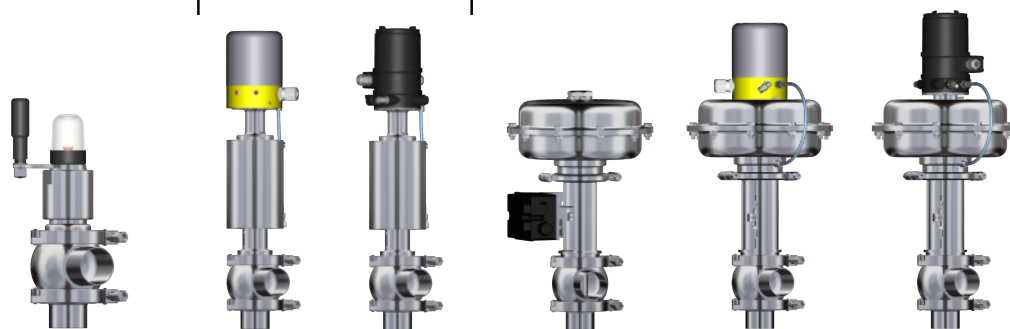

Housing form

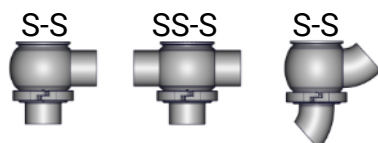

5 Function and operation

5.1 Description of function

The control valve is based on the KIESELMANN AI DS technology. Media with a KVS -values 0,1 m³/h to 160 m³/h can be regulated through the interchangeable seat concept.

Control via Bürkert Positioner

The valve is operated by means of a digital electro-pneumatic positioner. The positioner forms a closed circuit loop together with the lift actuator and the valve. The lift position defines the actual value which is recorded by a potentiometer. A proportional position is controlled with the specified target value (4-20mA). During the regulating process, the target value is constantly compared to the actual value; any regulating deviations are corrected. The micro-controller regulator allows an automatic zero and lift alignment and automatic commissioning.

Description of function - Control valve

Valve function:	• Regulation of media in pipelines.
Operation:	• pneumatic operation by a lift drive (air/spring or air/air) • manual operation by a crank-handle (open ↺ / close ↻)
Activation:	• pneumatically via solenoid valves (positioner) (see "Control via Bürkert positioner")







Description of function - Lift actuator

Normally closed (NC) Basic position: Valve close	
pneum. operated	→ opens the valve
<u>undivided</u> pneum. operated	→ spring force closes the valve

normal open (NO) Basic position: Valve open	
pneum. operated	→ valve "CLOSE"
<u>undivided</u> pneum. operated	→ spring force opens the valve

double acting (DA) Basic position: not defined ¹	
pneum. operated	→ opens the valve
<u>undivided</u> pneum. operated	→ valve "CLOSE"

5.2 Valve basic position:

Basic position: Kind of actuation:	Valve closed Normally closed (NC)	Valve open Normally open (NO)
Type: 911x S-S Angle valve	 Line A - B closed	 Line A - B open
Type: 912x SS-S T-valve	 Line A - B closed	 Line A - B open
Type: 913x S-S Inclined seat valve	 Line A - B closed	 Line A - B open

6 Commissioning, service and maintenance

6.1 Commissioning

6.1.1 Installation instructions

Fitting position

Any installation position is possible, however preferably it should be installed vertically. Non-vertical installation means that the outflow pipes must be arranged to allow the liquids to run freely out of the housing.



NOTICE

The flow direction is generally in the direction A.

If installed horizontally, some minor residual liquids will remain in the housing.

6.1.2 General welding guidelines

Sealing elements integrated in weld components must generally be removed prior to welding. To prevent damage, welding should be undertaken by certified personnel (EN ISO 9606-1). Use the TIG (Tungsten Inert Gas) welding process.



⚠ CAUTION

Damage and injuries due to high temperature supply

To avoid a distortion of the components, all welding parts must be welded to stress-relieved.

Allow all components to cool before assembling.



NOTICE

Damage due to impurities

Impurities can cause damage to the seals and seals area.

Clean inside areas prior to assembly.

6.1.3 ATEX - Guidelines

For valves or plants/installations that are operated in the ATEX area, sufficient bonding (grounding) must be ensured (see valid ATEX Guidelines EG).

6.2 Service



RECOMMENDATION

Replacement of seals


To achieve optimal maintenance cycles, the following points must be observed!

- When replacement of seals, all product-contacting seals should be replaced.
- Only original spare parts may be installed.

Maintenance interval

The maintenance intervals depend on the operating conditions "temperature, temperature-intervals, medium, cleaning medium, pressure and opening frequency". We recommend replacing the seals 1-year cycle. The user, however should establish appropriate maintenance intervals according to the condition of the seals.

Lubricant recommendation

	EPDM; HNBR; NBR; FKM; k-flex	- Klüber Paraliq GTE703*
	Silicone	- Klüber Sintheso pro AA2*
	Thread	- Interflon Food*
*) It is only permitted to use approved lubricants, if the respective fitting is used for the production of food or drink. Please observe the relevant safety data sheets of the manufacturers of lubricants.		

6.3 Cleaning

Cleaning


Ideally, cleaning is carried out with pipe system cleaning when the valve is open.

7 Technical data

7.1 Control valve Type 91xx

Model:	Control valve with <ul style="list-style-type: none"> • elastomer sealing at the regulation cone (Elastomer) • metallic sealing at the regulation cone (metallic/Elastomer) 	
Valve size:	DN20 - DN125 OD 1 Inch - OD 5 Inch	
Connections:	Weld-on end DIN EN 10357	
Temperature range:	Ambient temperature:	+4 to +45°C (air)
	Operating temperature:	+0 to +95°C (medium dependent)
	Sterilization temperature:	HNBR +120°C (SIP 30 min)
		EPDM/PTFE +140°C (SIP 30 min)
		FKM +110°C (SIP 30 min)
Pressure nominal (PN):	16 bar	
Leak rate:	A (DIN EN 12266-1)	
Control air:	<u>Control air pressure:</u>	<u>Quality of control air:</u>
	5,5 - 8,0 bar	ISO 8573-1 : 2001 quality class 3
Materials:	Stainless steel:	1.4404 / AISI 316 L
(in product contact)	Surfaces:	Ra ≤ 0,8µm - metallic bright; e-polished
	Sealing material:	k-flex (FDA) EPDM (FDA) PTFE (FDA) FKM (FDA)

7.2 Identification

Manufacturer Logo		CE 0036 EN ISO 4126-1 EAC	Standards
Order number	Order No.: xxxxxxxx / x	MM/JJJJ	Date
Item number	Serial No.: xxxxxxxxxxx-xxxx	AISI xxxx	Material
Nominal width	DN xxx	Ts -xx°C/+xxx°C	Operating temperature
Pressure nominal	PN xx	Kvs xxx	Discharge coefficient
	Made in the EU		

7.3 Torques

	ND	25	40	50	65	80	100	125	150
	Inch	1	1½	2	2½	3	4	5	6
Clamp coupling (Nm):		15	15	15	25	25	55	65	65





7.4 KV - value

K ^{vs} -value, Valve size & Actuator size													
Pneumatic actuator					Piston actuator					Diaphragm actuator			
Valve size					H104	H129	H167	H190	H230	M02	M2	M4	M10
Control air pressure [bar]					5.5	5.5	5.5	5.5	5.5	4	3	3	3
K _{vs} -value [m³/h]	DN	OD	Seat-Ø [mm]	Stroke [mm]	Adm. Operating Pressure [bar]								
0.2	20	-	5	16	16								
0.4	25	1"	6	20	16					16			
1.0	25	1"	6	20	16					16			
1.6	25	1"	12	20	16					16			
2.5	25	1"	12	20	16					16			
4	25	1"	12	20	16					16			
	40	1½"			16					16			
7	25	1"	22	20	16					16			
	40	1½"			16					16			
10	25	1"	22	20	16	16				16	16		
	40	1½"			16	16				16	16		
	50	2"			16	16				16	16		
18	40	1½"	34	20	14	16				7	16		
	50	2"			14	16				7	16		
	65	2½"			14	16				7	16		
26	50	2"	46	20	7.5	11	16				16		
	65	2½"			7.5	11	16				16		
	80	3"			7.5	11	16				16		
40	50	2"	46	27		10	16					16	
	65	2½"				10	16					16	
	80	3"				10	16					16	
	100	4"				10	16					16	
	65	2½"					12	16				12	16
52	80	3"	60	27			12	16				12	16
	100	4"					12	16				12	16
68	65	2½"	60	27			12	16	16			12	16
	80	3"					12	16	16			12	16
	100	4"					12	16	16			12	16
85	80	3"	72	27			8	14	14			8.5	16
	100	4"					8	14	14			8.5	16
100	80	3"	81	27			6.5	11	11			7	16
	100	4"					6.5	11	11			7	16
	125	-					6.5	11	11			7	16
120	100	4"	95	27				7.5	7.5				13
	125	-						7.5	7.5				13
160	125	-	125	27				4.5	4.5				8

8 Disassembly and assembly

8.1 Disassembly

Mounting tools

T1		Combination wrench-Set	SW 8 - SW 24	-
T2		Allen key - Set	1.5 - 10	-
T10		Joint -pin wrench	Pin Ø6	8027000065-000
T11		Hinged hook wrench	DN25 - DN100 90/155 V2A	8028025100-020
T12a		Articulated face wrench	40-80mm, Pin Ø6 40-80mm, Pin Ø5 80-125mm, Pin Ø8	8028340080-000 8028340085-000 8028380125-000
T32		ø8	ø8	5620065007-020
T35		Pin punch	ø5	-




NOTICE

All threaded joint have right-hand thread.

Unscrew and remove control air, steam resp. cleaning lines and electrical lines, complete feedback unit or control head.

flow cone

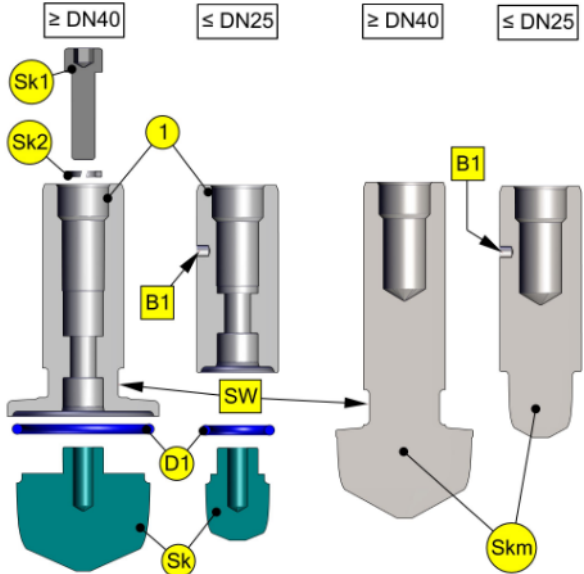	elastomer sealing at the flow cone (SK)	metallic sealing at the flow cone (Sk _m)
<ul style="list-style-type: none"> • 1 = Piston • B1 = Bore • D1 = O-ring • Sk_m = Flow cone metallic • Sk = Flow cone elastomer • Sk1 = Screw • Sk2 = Disc 	 <p>The diagrams illustrate the assembly of a flow cone. The left side shows elastomer sealing (SK) for diameters ≥ DN40 and ≤ DN25. It includes a piston (1), a bore (B1), a screw (Sk1), a disc (Sk2), an O-ring (D1), and the elastomer (Sk). The right side shows metallic sealing (Sk_m) for the same diameter ranges, featuring a bore (B1) and the metallic flow cone (Sk_m). A wrench (SW) is shown in the center, indicating the assembly point.</p>	

8.1.1 Removing wearing parts - Valve with manual actuator

Dismount the valve insert

- Unscrew the clamp coupling (VK).
- Dismount the valve insert (VE1) out of the housing (VG).
- Remove the housing bottom (Gb1) and interchangeable seat (Ws).
- Remove the O-rings (D6) and (D7).

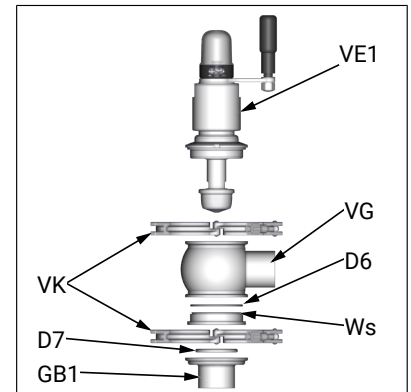


Figure 1

Replacement of seals



INFORMATION

Construction-conditioned, there are two variants for dismantle of the piston (1) or metallic sealing flow cone (Skm):

- Fig. 3: Dismounting via bore (B1) (\leq DN25).
- ⇒ So that the bore (B1) will be visible, first unscrew the insert (2).
- Fig. 4 Dismounting via spanner flat (SW1) (\geq DN40).

NOTICE!

The piston rod must be locked for the following steps:

- Hold the piston rod (9) with a punch (T31) at the bore (B2).
 - For this purpose, the bore (B2) in the housing (2) and in the piston rod (9) must be adjusted congruently using the hand crank (19).
 - Now push the punch (T31) into the hole (B2).

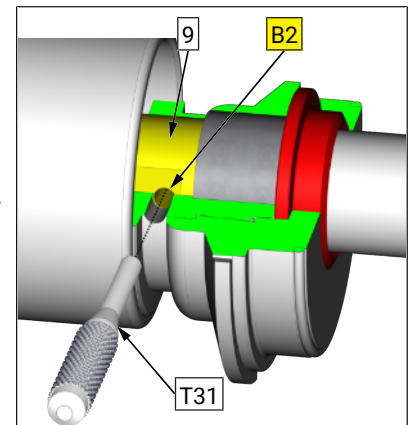


Figure 2

- So that the bore (B1) will be visible, first unscrew the insert (2) as shown in figure.
- Hold the piston rod (9) with a punch (T31) at the bore (B2).
 - For this purpose, the bore (B2) in the housing (2) and in the piston rod (9) must be adjusted congruently using the hand crank (19).
- Unscrew the piston (1) respectively the flow cone (Skm) with a pin wrench (T10).

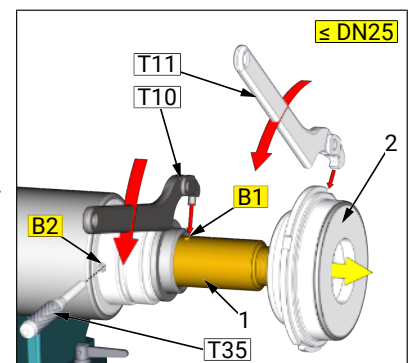


Figure 3

- Unscrew the piston (1) respectively the flow cone (Skm) with a spanner (T1) from spindle (11).
Hold on at the spanner flat (SW1).

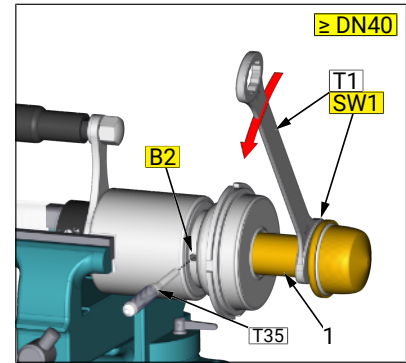


Figure 4

- Unscrew with a hook wrench (T11) the insert (2) from the lantern (14).

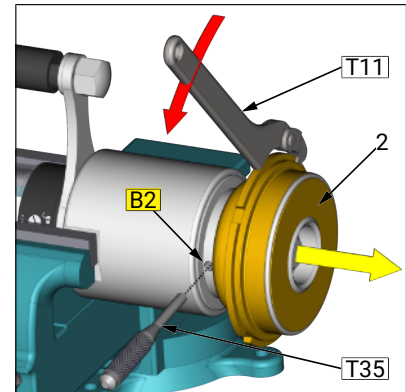


Figure 5

- The manual actuator (HA) do not need to be removed for a seal change.
- Remove O-ring (2) and seal (D3).

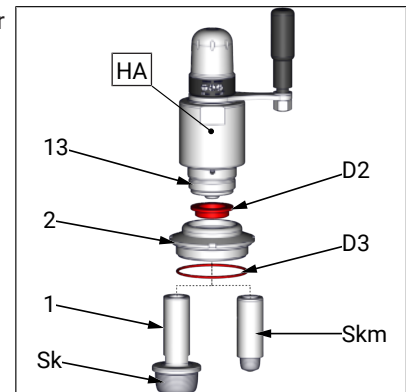


Figure 6

- Clamp the cone (Sk) in a soft jawed vice. Unscrew the screw (Sk1).
Remove piston (1) and O-ring (D1).

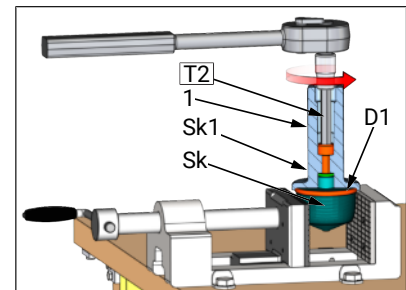


Figure 7



NOTICE

Bearing bush (3) do not need to be removed for a seal change. The positions are not included in the seal set. If they are worn, please order them with the seals (see wearing parts kit).

8.1.2 Removing wearing parts - Valve with manual actuator

Remove the valve insert (NC)

- Connect compressed air to air supply (LA2). The piston (1) retracts.
- Unscrew the clamp coupling (VK).
- Dismount the valve insert (VE2) out of the housing (VG).
Disconnect compressed air from air supply (LA2). The piston (1) returns to the basic position.

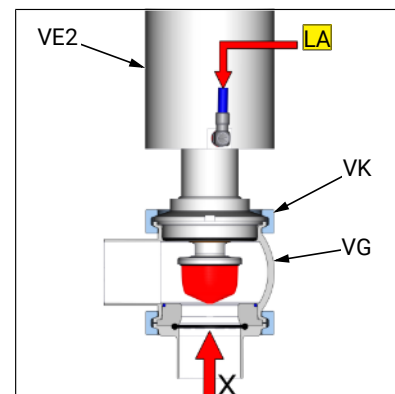


Figure 1

Remove the valve insert (NO) (DA)

- Unscrew the clamp coupling (VK).
- Dismount the valve insert (VE2) out of the housing (VG).

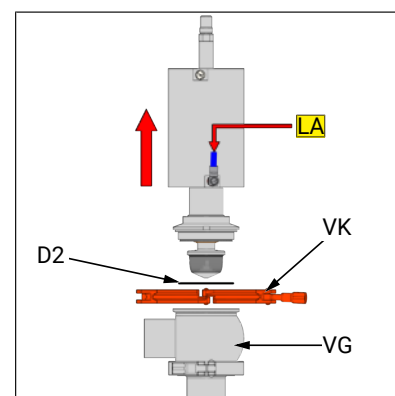


Figure 2

Replacement of seals

- Remove O-ring (D2).



INFORMATION

Construction-conditioned, there are two variants for dismantle of the piston (1) or metallic sealing flow cone (Skm):

- Fig. 3 Dismounting via bore (B1) (\leq DN25). So that the bore (B1) will be visible, first unscrew the insert (2) as shown in figure 3.
- Fig. 4 Dismounting via spanner flat (SW1) (\geq DN40).

- So that the bore (B1) will be visible, first unscrew the insert (2) as shown in figure.
- Unscrew the piston (1) respectively the flow cone (Sk) from the spindle (6) with a pin wrench (T10).
Hold on at the spanner flat (SW2).

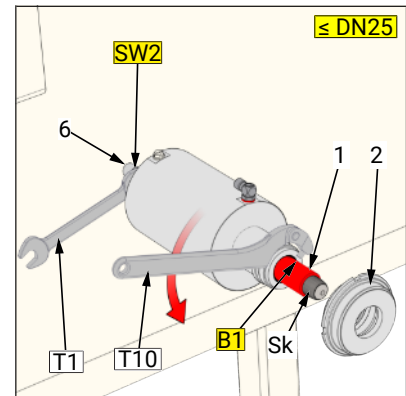


Figure 3

- Unscrew the piston (1) respectively the flow cone (Sk) with a spanner (T1) from spindle (6).
Hold on at the spanner flat (SW2).

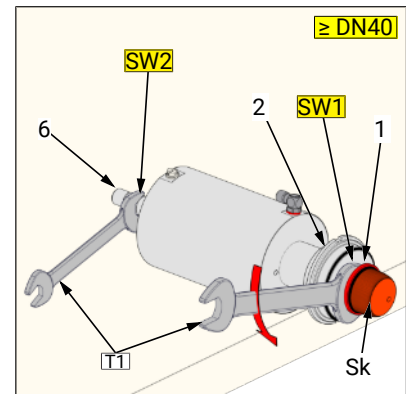


Figure 4

- Unscrew with a hook wrench (T11) the insert (2) from the lantern (4).
For this, holding on the lantern (4) with a pin wrench (T10).
- Remove seal (D3).

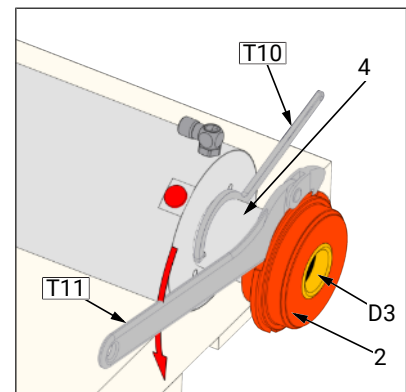


Figure 5

- Unscrew the lantern (4) with a pin wrench (T10) from actuator (PHA) and push it from piston rod (6).

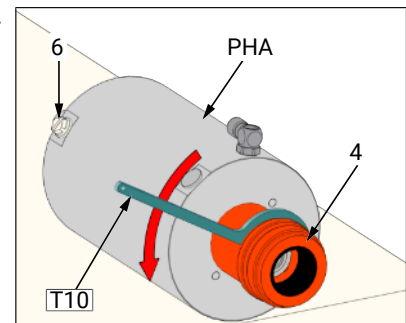


Figure 6

- Remove the distance (8), O-rings (D4) and (D5).

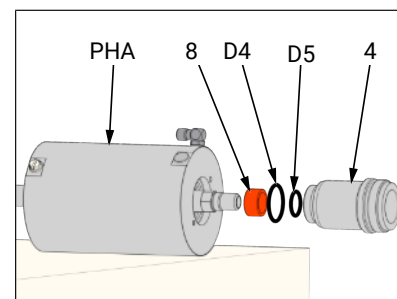


Figure 7



NOTICE

The distance (8) is fitted only with metric valves.

The bearing bushes (3) and (5) and the O-rings (D4) and (D5) do not need to be removed for a product-contacted seal change. The positions are not included in the seal set. If they are worn, please order them (see wearing parts kit).

- Unscrew the insert (7) from the actuator (PHA) with a pin type face spanner (T12).

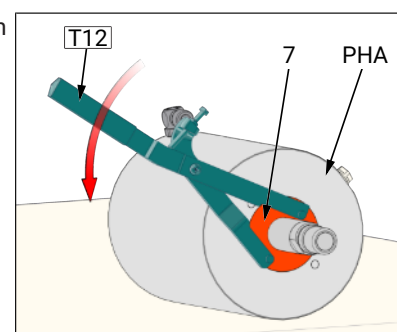


Figure 8

- Remove the O-rings (D4) and (D5).

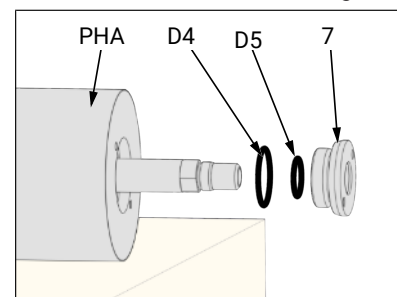


Figure 9

- Clamp the cone (Sk) in a soft jawed vice. Unscrew the screw (Sk1). Remove piston (1) and dismantle O-ring (D1).

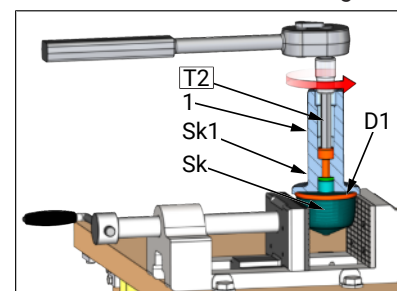


Figure 10

8.1.3 Removing wearing parts - Valve with diaphragm actuator

Remove the valve insert (NC)

- Connect compressed air to air supply (LA2). The piston (1) retracts.
- Unscrew the clamp coupling (VK).
- Dismount the valve insert (VE3) out of the housing (VG).
Disconnect compressed air from air supply (LA2). The piston (1) returns to the basic position.

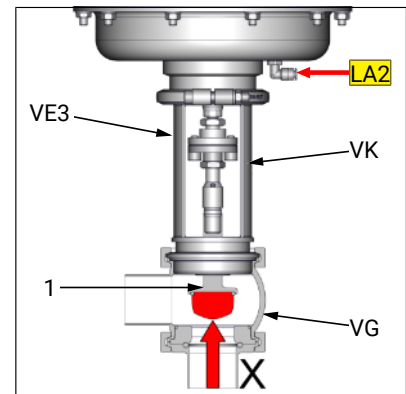


Figure 1

Remove the valve insert (NO) (DA)

- Unscrew the clamp coupling (VK).
- Dismount the valve insert (VE3) out of the housing (VG).

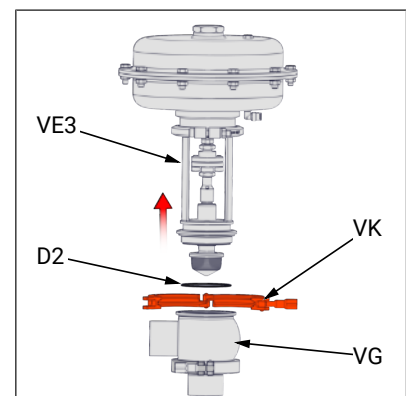


Figure 2

Replacement of seals

- Remove O-ring (D2).



INFORMATION

Construction-conditioned, there are two variants for dismantle of the piston (1) or metallic sealing flow cone (SkM):

- Fig. 3 Dismounting via bore (B1) (\leq DN25). So that the bore (B1) will be visible, first unscrew the insert (2) as shown in figure 3.
- Fig. 4 Dismounting via spanner flat (SW1) (\geq DN40).

- So that the bore (B1) will be visible, first unscrew the insert (2).
 - Unscrew the piston (1) respectively the flow cone (Sk_m) from the spindle (6) with a pin wrench (T10).
- Use a round rod (T31) to hold up against the spindle (6) via the bore (Ø5).

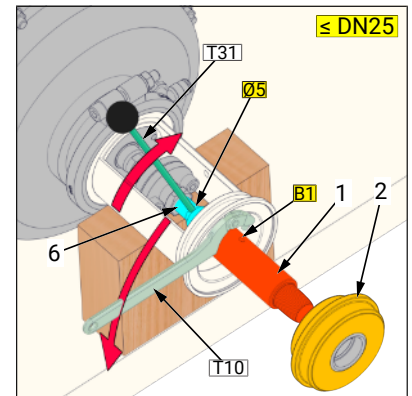


Figure 3

- Unscrew the piston (1) respectively the flow cone (Sk_m) with a spanner (T1) from spindle (6).
- Use a round rod (T31) to hold up against the spindle (6) via the bore (B1).

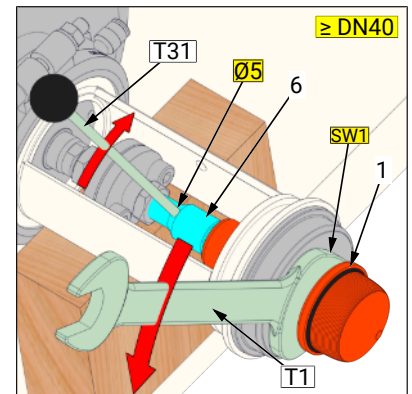


Figure 4

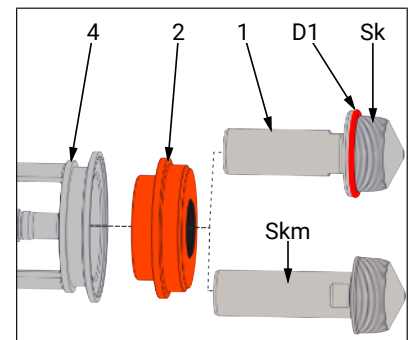


Figure 5

- Clamp the insert (2) in a soft jawed vice.
- Unscrew the lantern insert (7) from the insert (2) with a pin type face spanner (T12).

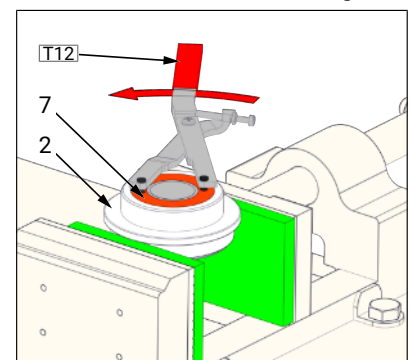


Figure 6

- Dismount seal (D3).

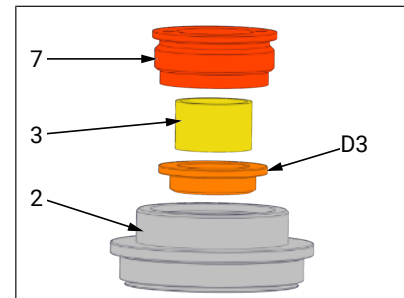


Figure 7



NOTICE

The bearing bush (3) do not need to be removed for a product-contacted seal change. The positions are not included in the seal set. If they are worn, please order them (see wearing parts kit).

- Clamp the cone (Sk) in a soft jawed vice. Unscrew the screw (Sk1). Remove piston (1) and dismantle O-ring (D1).

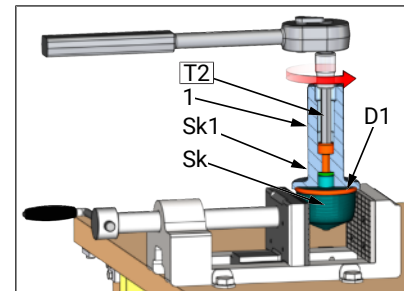


Figure 8

8.1.4 Removing Interchangeable seat

- Unscrew the clamp coupling (VK).
- Remove housing bottom (GB), interchangeable seat (WS), O-ring (D6) and (D7) from housing (VG).

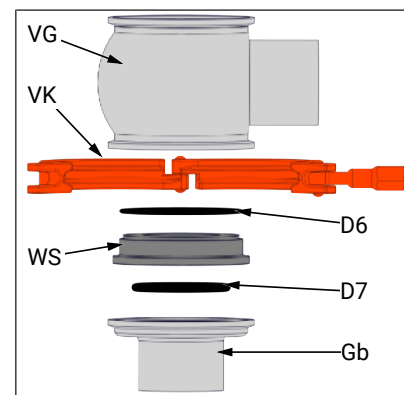


Figure 1

8.2 Assembly

- Assemble in reverse order.
- Before installation, thoroughly clean and slightly lubricate mounting areas and running surfaces.
- Check the function according to the specified performance data in the operating state.



NOTICE

Screw locking

- Assemble the thread connection (G1) with removable screw retention.
 - e. g. Loctite 243

Clamp coupling (VK)




NOTICE

During assembly, the following points must be observed!

Carefully fit in the complete valve insert into the casing. When fitting the valve insert and running surfaces onto the piston, do not damage.

➤ Mounting clamp coupling

- For mounting the clamp coupling, please note that it continuously fits form locking to the inclinations of the casing and the lantern/casing bottom.
- The centring of the retaining clamp during tightening can be accomplished with a slight beat (please use a soft-head hammer) on the extent of the retaining clamp.
- When tightening the clamp coupling, please pay attention to the turning moment and the gap size 'S' ($\leq 0,4\text{mm}$) between the components.
- Check valve functions by manually activating the 3/2-way solenoid valves after assembly!

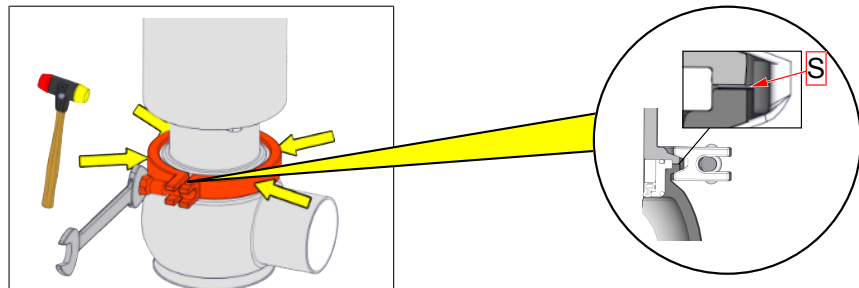

Torques

Tightening moment: (in Nm)	25	40	50	65	80	100
Clamp coupling (Nm):	15	15	15	25	25	55

9 Mounting kit for positioner

9.1 Bürkert positioner Type 8692, 8694

Disassembly



NOTICE

Before reaching into the device or the equipment, please note the operating instructions and the safety instructions for the Bürkert Positioner.

(Operating instructions for Bürkert Type 8615500120 / Type 8615500130-000)



⚠ DANGER

Energized components

Electric shock and destruction of the board may occur.

- Before reaching into the device or the equipment, switch off the power supply and secure to prevent reactivation.
- Wear grounding bracelet.
- Observe applicable accident prevention and safety regulations for electrical equipment!



⚠ CAUTION

Risk of breakage




Breakage of the pneumatic connection pieces due to rotational impact!

- Before reaching into the device or the equipment, disconnect the compressed-air supply at the Positioner.
- Hold the electrical connection housing when unscrewing the housing jacket.

- Hold the electrical connection housing (B2) in place.
- Unscrew the housing jacket (B1) in a counter-clockwise direction and remove them.
- Remove the seal (1.2).
- Remove electronics module (BSM).

- Pull off the puck (B5) upwards from the shift spindle (B7).
- Screw out the screws (B4) max. 6-7 turns, not unscrewed.
 - (when unscrew complete the sheet metal nut is destroyed and must be replaced.)

- Remove carefully the Positioner upwards.
- Unscrew the screws (B12) and remove the adapter (B9).
- Unscrew the spindle adapter (B8) with the stem (B7) from the actuator spindle.

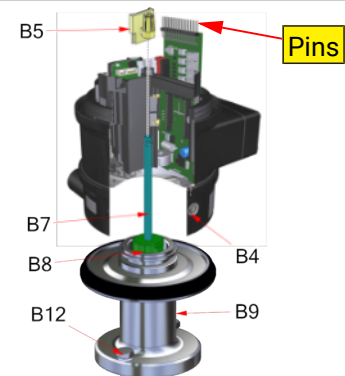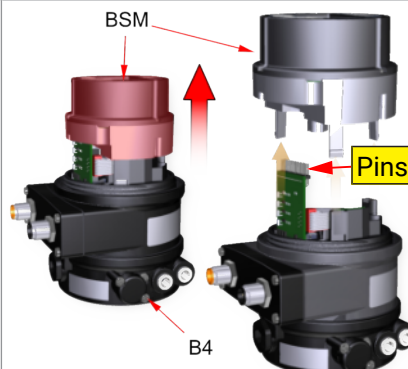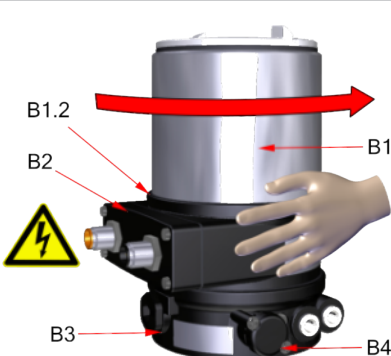

Assembly

- Assemble in reverse order.
- Before installation, thoroughly clean and slightly lubricate mounting areas and running surfaces.
- Check the function according to the specified performance data in the operating state.

**CAUTION****Risk of breakage**

Breakage of the pneumatic connection pieces due to rotational impact!

- When inserting the housing jacket, do not hold the actuator but the electrical connection housing above.
- Check that the seal is correctly positioned on the housing jacket.
- Tighten the screws (B4) only lightly (maximum tightening torque: 0.5 Nm).

**CAUTION****Risk of breakage**

Be careful not damage the pins at the board!

- Attach electronics module carefully and press down evenly until the holders snap into place.

Art.-No.: 5200 104 561-000 (B2+B4 nickelized)

Art.-No.: 5200 104 561-100 (B2+B4 V2A)

Electro-pneumatical Positioner (the Positioner is not include in the mounting kit)


- B1 = Housing body
 B2 = Electrical connection
 B3 = Housing actuator
 B4 = Fastening screw
 B5 = Puck
 B6 = Seal
 B7 = Spindle
 B8 = Spindle adapter M4-M10
 B9 = Adapter
 B10 = O-ring
 B11 = Disc
 N12 = Screw DIN933

BS1 = Circular plug-in connector 24V DC
 (electrical connection)

BEM = Electronics Module

B.LA1 = Additional air port

B.LA2 = Additional Exhaust

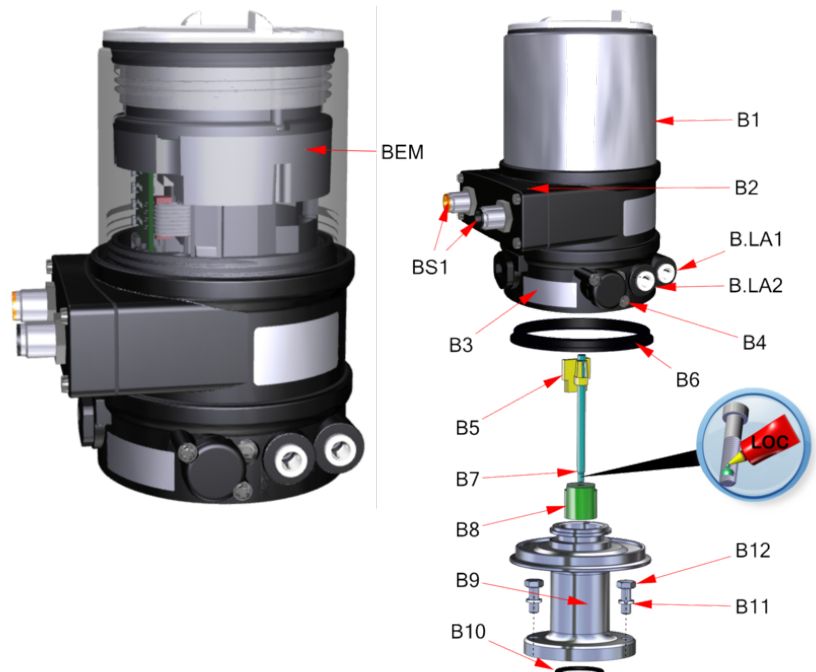

9.2 Guth Positioner DIGIPOS

Disassembly



NOTICE

Before reaching into the device or the equipment, please note the operating instructions and the safety instructions for the Guth DigiPos Positioner.

(Operating Instructions for Guth DigiPos Typ BA_DP_022012)






DANGER

Energized components

Electric shock and destruction of the board may occur.

- Before reaching into the device or the equipment, switch off the power supply and secure to prevent reactivation.
- Wear grounding bracelet.
- Observe applicable accident prevention and safety regulations for electrical equipment!
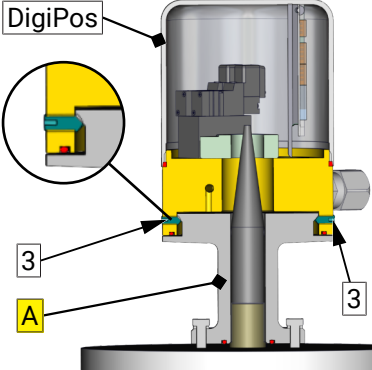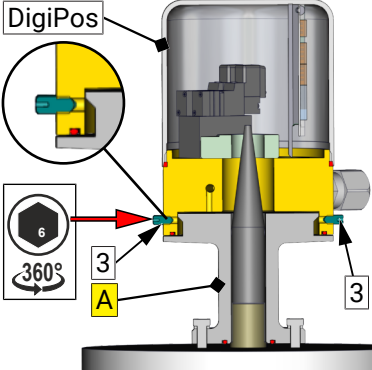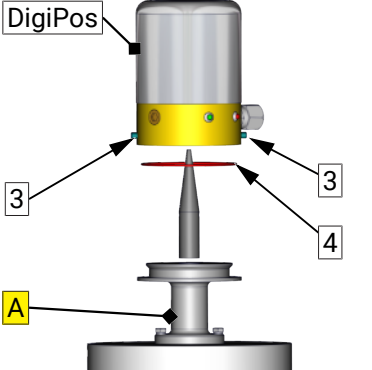
<ul style="list-style-type: none"> Disconnect all supply lines from the power supply and disconnect them. 	<ul style="list-style-type: none"> Loosen the set screws (3) 3-4 turns. 	<ul style="list-style-type: none"> Remove the positioner (DigiPos) from the adaptation (A). Remove O-ring (4).
		

Assembly


- Assemble in reverse order.
- Before installation, thoroughly clean and slightly lubricate mounting areas and running surfaces.
- Check the function according to the specified performance data in the operating state.

Art.-No.: 5200 104 571-000 (LA nickelized)

Art.-No.: 5200 104 571-000 (LA nickelized)

Adaptation (A1 - A5) - DigiPos positioner on control valve with linear actuator

(the Positioner is not include in the mounting kit)


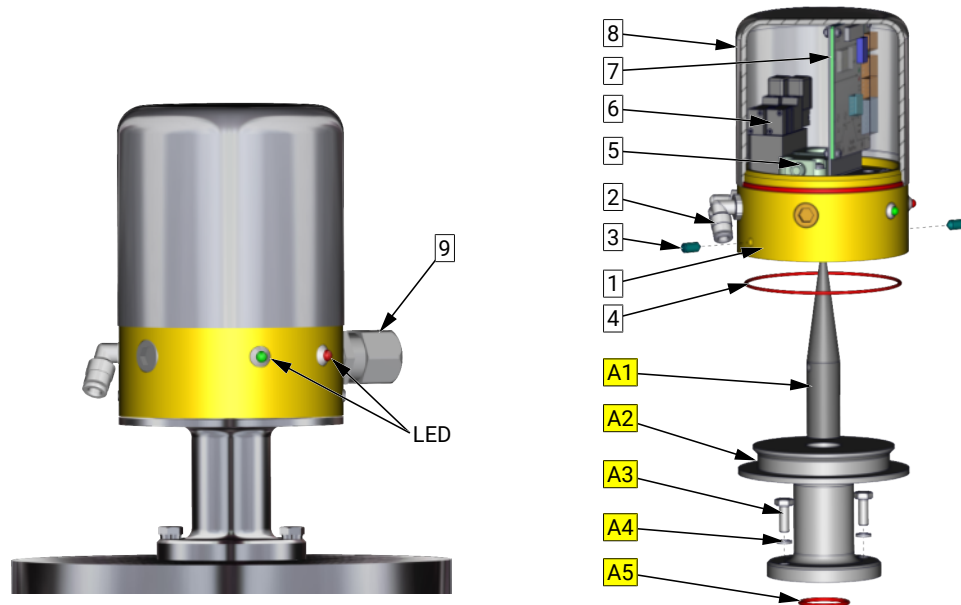


1 Base body	2 Air supply
3 Threaded pin	4 O-ring
5 Inductive ring sensor	6 Valve assembly
7 DigiPos board	8 Bonnet
9 cable fitting M20x1/4	A1 Cone
A2 Adapter	A3 Screw
A4 Disc	A5 O-ring

10 Drawings and dimensions

10.1 Drawings

Valve structure

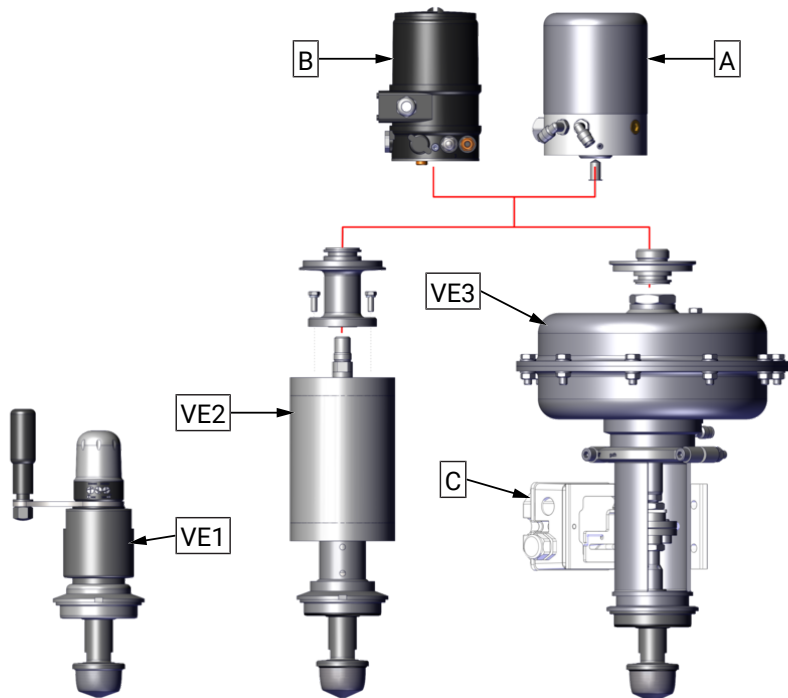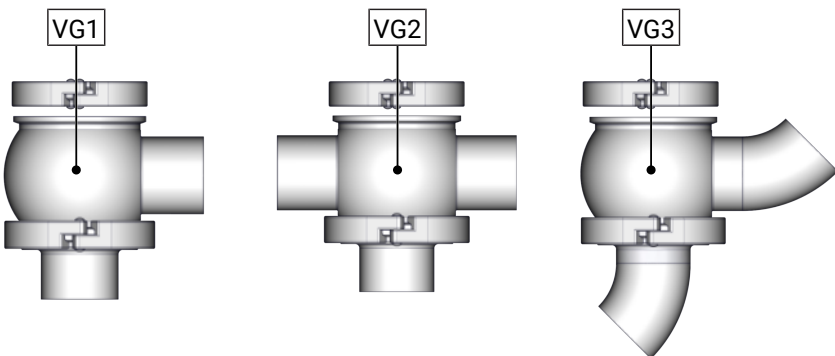	Manual operation with crank handle	Pneumatic operation with piston actuator	Pneumatic operation with diaphragm actuator
<p>A = Positioner DIGIPOS B = Positioner Bürkert Type 869x C = Positioner Samson</p> <p>VE1 = Valve insert manual operation VE2 = Valve insert with pneum. piston actuator VE3 = Valve insert with dia- phragm actuator</p>			
<p><u>Housing design</u></p> <p>VG1 = Angle - form (S-S) VG2 = T-Form (SS-S) VG3 = Inclined - form (S-S)</p>			


Valve inserts

- 1 = Piston
- 2 = Insert
- 3 = Plain bearing
- 4 = Lantern
- 5 = Bearing bush
- 6 = Spindle
- 7 = Insert lantern
- 8 = Valve lift stop


(not applicable by Inch-version)

- 9 = Piston rod
- 10 = Set screw
- 11 = Spindle
- 12 = Bearing bush
- 13 = Housing
- 14 = Housing body
- 15 = Guide nut
- 16 = Adapter
- 17 = Cap
- 18 = Hood
- 19 = Crank handle

Manual operation
with crank handle

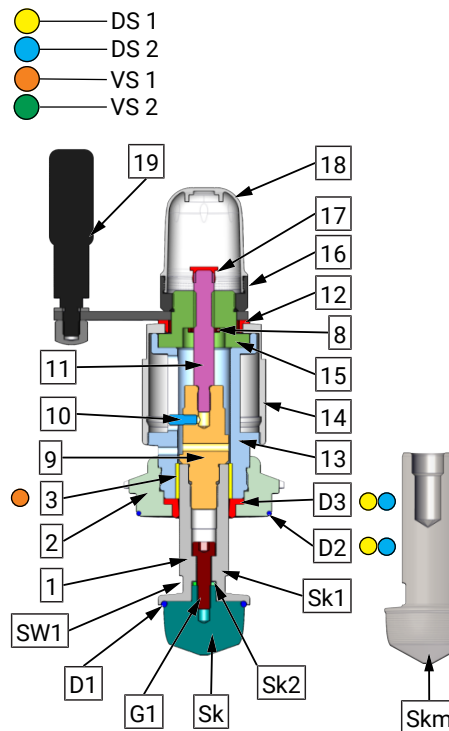


Pneumatic operation
with piston actuator

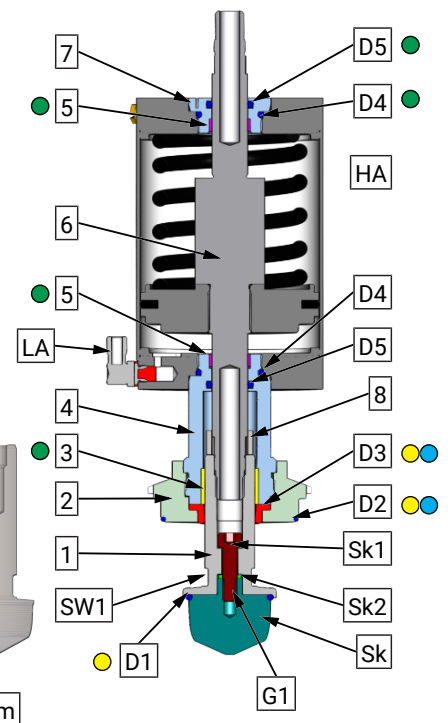

seals

- D1 = O-ring
- D2 = O-ring
- D3 = Shaft seal
- D4 = O-ring
- D5 = O-ring
- D6 = O-ring
- D7 = O-ring

- Gb1 = Housing bottom straight
- Gb2 = Housing bottom inclined
- Skm = Flow cone metallic
- Sk = Flow cone elastomer
- Sk1 = Screw
- Sk2 = Disc
- VG1 = Housing angle form
- VG2 = Housing T - form
- VG3 = Housing Inclined - form
- VK = Clamp coupling
- Ws = Interchangeable seat
- G1 = Secure with threaded connection "removable" (e.g. Loctite 243).
- SW = Wrench size
- PHA = pneum. Actuator

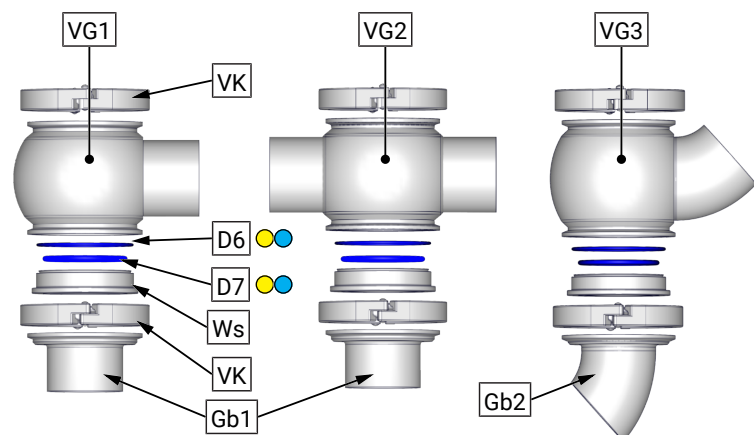

Pneumatic operation with diaphragm actuator


- 1 = Piston
- 2 = Insert
- 3 = Bearing bush
- 4 = Lantern
- 5 = --
- 6 = Spindle
- 7 = Insert lantern
- 8 - 19 = --
- 20 = Coupling lower
- 21 = Coupling upper
- 22 = Nut
- 23 = Screw
- 24 = Schaft
- 25 = Plain bearing
- 26 = Adapter flange

seals

- D1 = O-ring
- D2 = O-ring
- D3 = Shaft seal
- D4 - 5 = --
- D6 = O-ring
- D7 = O-ring
- D8 = O-ring
- D9 = O-ring
- D10 = Lip seal
- D11 = O-ring
- D12 = O-ring

- Gb1 = Housing bottom straight
- Gb2 = Housing bottom inclined


- MA = Diaphragm actuator
- Skm = Flow cone metallic
- Sk = Flow cone elastomer
- Sk1 = Screw
- Sk2 = Disc
- VG1 = Housing angle form
- VG2 = Housing T - form
- VG3 = Housing Inclined - form
- VK = Clamp coupling
- Ws = Interchangeable seat
- G1 = Secure with threaded connection "removable" (e.g. Loctite 243).

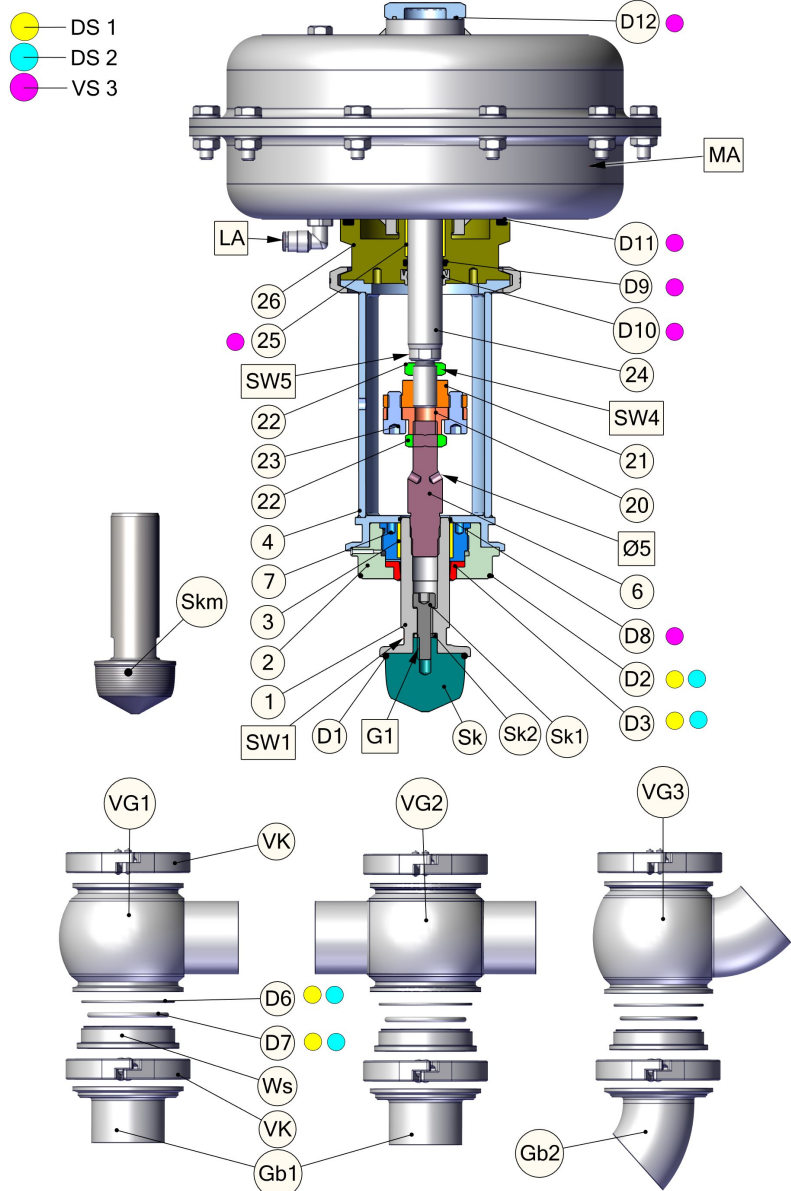

SW = Wrench size

Wrench size	DN = Nominal diameter OD = Outside diameter						
	DN 25 OD 1 “	DN 40 OD 1½ “	DN 50 OD 2 “	DN 65 OD 2½ “	DN 80 OD 3 “	DN 100 OD 4 “	DN 125 OD 5 “
SW1	-	24					
SW2	17						
SW3	11						
SW4	17						
SW5	22						

10.2 Dimensions

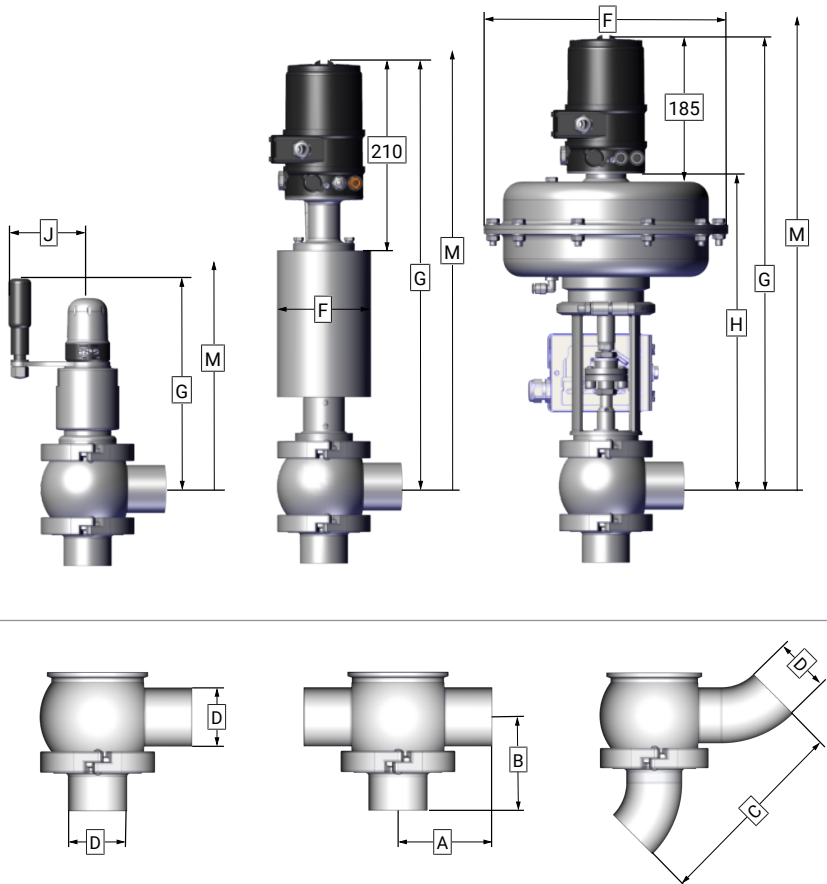Valve kind: Kind of actuation: Actuator:	Manual operation with crank handle (manual)	Pneumatic operation with piston actuator (H104 / H129 / H267 / H230)	Pneumatic operation with diaphragm actuator (M02 / M2 / M4 / M10)
			

Dimensions											
Nominal width	D	A	B	C	E	Actuator	F	G*	H**	Y	M
DN 20	Ø 23 x 1,5	65	65	-	-	H104	Ø 104	446	-	-	~520
DN 25 OD 1	Ø 29 x 1,5 Ø25.4x1.25	75	75	82	57 54	manual	-	~224	-	88	-
						H104	Ø 104	459	-	-	~530
						H129	Ø 129	459	-	-	~530
						M02	Ø 165	437	287	-	~540
						M2	Ø 270	487	334	-	~600
DN 40 OD 1"	Ø 41 x 1,5 Ø38,1 x 1,65	85	85	129	69 66.1	manual	-	~230	-	88	-
						H104	Ø 104	466	-	-	~540
						H129	Ø 129	466	-	-	~540
						M02	Ø 165	443	293	-	~540
						M2	Ø 270	493	340	-	~650
DN 50 OD 2	Ø 53 x 1,5 Ø50,8 x 1,65	85	85	150	81 79	manual	-	~236	-	88	-
						H104	Ø 104	472	-	-	~570
						H129	Ø 129	472	-	-	~570
						H167	Ø 167	472	-	-	~570
						M2	Ø 270	505	355	-	~510
						M4	Ø 270	494	341	-	~650
DN 65 OD 2"	Ø 70 x 2,0 Ø63,5 x 1,65	105	105	188	97 91.5	manual	-	~244		88	
						H129	Ø 129	480	-	-	~600
						H167	Ø 167	480	-	-	~600
						H190	Ø 190	480	-	-	~600
						H230	Ø 230	480	-	-	~600
						M2	Ø 270	511	358	-	~660
						M4	Ø 270	511	358	-	~660
						M10	Ø 400	598	445	-	~720
DN 80 OD 3	Ø 85 x 2,0 Ø76.2x1.65	115	115	222	112 104	manual	-	~252	-	88	-
						H129	Ø 129	487	-	-	~620
						H167	Ø 167	487	-	-	~620
						H190	Ø 190	487	-	-	~620
						H230	Ø 230	487	-	-	~620
						M2	Ø 270	519	366	-	~670
						M4	Ø 270	519	366	-	~670
						M10	Ø 400	606	453	-	~740
DN 100 OD 4	Ø 104 x 2,0 Ø101,6 x 2,0	130	130	250	131 129	manual	-	~261	-	88	-
						H129	Ø 129	497	-	-	~650
						H167	Ø 167	497	-	-	~650
						H190	Ø 190	497	-	-	~650
						H230	Ø 230	497	-	-	~650
						M4	Ø 270	540	387	-	~690
						M10	Ø 400	619	466	-	~770
DN 125	Ø 129 x 2,0	160	160	-	-	manual	-	~274	-	88	-
						H190	Ø 190	510	-	-	~690
						H230	Ø 230	510	-	-	~690
						M4	Ø 270	553	400	-	~700
						M10	Ø 400	632	479	-	~880
*	Dimension G: actuator with top-mounted positioner										
**	Dimension H: positioner mounted on NAMUR interface										

11 Wearing parts

11.1 Overview - Seal and wearing parts kits

Wear parts kit - in product contact		Material:	Designation
DS 1	a	Elastomer / EPDM	in product contact wearing part set elastomer sealing at the regulation cone
	b	Elastomer / HNBR	
	c	Elastomer / FKM	
DS 2	a	metallic / EPDM	in product contact wearing part set metallic sealing at the regulation cone
	b	metallic / HNBR	
	c	metallic / FKM	

Wear parts kit - Actuator		Material:	Designation
VS 1			Wearing parts set for manual operation valves (without positions from the wearing part set - in product contact)
VS 2			Wearing parts set for pneumatic operation valves with piston actuator (without positions from the wearing part set - in product contact)
VS 3			Wearing parts set for pneumatic operation valves with diaphragm actuator (without positions from the wearing part set - in product contact)

Po s.	Designation	DS 1 a / b / c	DS 2 a / b / c	VS 1	VS 2	VS 3
D1	O-ring (EPDM / HNBR / FKM)	x				
D2	O-ring (EPDM / HNBR / FKM)	x	x			
D3	Seal (EPDM / HNBR / FKM)	x	x			
D4	O-ring (NBR)				x	
D5	O-ring (HNBR)				x	
D6	O-ring (EPDM / HNBR / FKM)	x	x			
D7	O-ring (EPDM / HNBR / FKM)	x	x			
D8	O-ring					x
D9	O-ring					x
D10	Scraper ring (NBR)					x
D11	O-ring					x
D12	O-ring					x
3	Plain bearing (XSM)			x	x	
5	Plain bearing (XSM)				x	
13	Scraper ring (NBR)			x		
25	Plain bearing (XSM)					x

Wearing part set DS1 (elastomeric sealing)

DN OD	K _{VS} Value	Seat-Ø	Wear parts kit DS 1a EPDM	Wear parts kit DS 1b HNBR	Wear parts kit DS 1c FKM
20	0.2	ø 5	9110 010 200-K990	9110 010 200-O990	9110 010 200-S990
25	0.4	ø 6	9110 010 400-K990	9110 010 400-O990	9110 010 400-S990
1"	1.0	ø 12	9110 012 000-K990	9110 012 000-O990	9110 012 000-S990
	1.6				
	2.5				
	4.0				
	7.0	ø 22	9110 017 000-K990	9110 017 000-O990	9110 017 000-S990
	10.0				
40	4.0	ø 12	9110 024 000-K990	9110 024 000-O990	9110 024 000-S990
1½"	7.0	ø 22	9110 027 000-K990	9110 027 000-O990	9110 027 000-S990
	10	ø 31	9110 029 100-K990	9110 029 100-O990	9110 029 100-S990
	18				
50	10	ø 22	9110 035 100-K990	9110 035 100-O990	9110 035 100-S990
2"	18	ø 31	9110 039 100-K990	9110 039 100-O990	9110 039 100-S990
	26	ø 46	9110 033 300-K990	9110 033 300-O990	9110 033 300-S990
	40				
65	18	ø 31	9110 049 100-K990	9110 049 100-O990	9110 049 100-S990
2½"	26	ø 46	9110 043 300-K990	9110 043 300-O990	9110 043 300-S990
	40	ø 60	9110 047 300-K990	9110 047 300-O990	9110 047 300-S990
	52				
	68				
80	26	ø 46	9110 053 300-K990	9110 053 300-O990	9110 053 300-S990
3"	40	ø 60	9110 057 300-K990	9110 057 300-O990	9110 057 300-S990
	68				
	52				
	85				
	100	ø 81	9110 053 300-K990	9110 053 300-O990	9110 053 300-S990
100	40	ø 46	9110 065 300-K990	9110 065 300-O990	9110 065 300-S990
4"	52	ø 60	9110 067 300-K990	9110 067 300-O990	9110 067 300-S990
	68	ø 72	9110 065 400-K990	9110 065 400-O990	9110 065 400-S990
	85				
	100				
	120				
		ø 95	9110 061 700-K990	9110 061 700-O990	9110 061 700-S990
125	85	ø 72	9110 075 400-K990	9110 075 400-O990	9110 075 400-S990
5"	100	ø 81	9110 073 500-K990	9110 073 500-O990	9110 073 500-S990
	120	ø 95	9110 071 700-K990	9110 071 700-O990	9110 071 700-S990
	160	ø 125	9110 075 500-K990	9110 075 500-O990	9110 075 500-S990

Wearing part set DS2 (metallic sealing)


DN OD	K _{VS} Value	Seat-Ø	Wear parts kit DS 2a EPDM	Wear parts kit DS 2b HNBR	Wear parts kit DS 2c FKM
25 1"	0.4	ø 6	9110 010 400-M990	9110 010 400-Q990	9110 010 400-U990
	1.0				
	1.6	ø 12	9110 012 000-M990	9110 012 000-Q990	9110 012 000-U990
	2.5				
	4.0				
40 1½"	7.0	ø 22	9110 017 000-M990	9110 017 000-Q990	9110 017 000-U990
	10.0				
	4.0	ø 12	9110 024 000-M990	9110 024 000-Q990	9110 024 000-U990
	7.0	ø 22	9110 027 000-M990	9110 027 000-Q990	9110 027 000-U990
	10				
50 2"	18	ø 31	9110 029 100-M990	9110 029 100-Q990	9110 029 100-U990
	10	ø 22	9110 035 100-M990	9110 035 100-Q990	9110 035 100-U990
	18	ø 31	9110 039 100-M990	9110 039 100-Q990	9110 039 100-U990
	26	ø 46	9110 033 300-M990	9110 033 300-Q990	9110 033 300-U990
	40				
65 2½"	18	ø 31	9110 049 100-M990	9110 049 100-Q990	9110 049 100-U990
	26	ø 46	9110 043 300-M990	9110 043 300-Q990	9110 043 300-U990
	40				
	52	ø 60	9110 047 300-M990	9110 047 300-Q990	9110 047 300-U990
	68				
80 3"	26	ø 46	9110 053 300-M990	9110 053 300-Q990	9110 053 300-U990
	40				
	68	ø 60	9110 057 300-M990	9110 057 300-Q990	9110 057 300-U990
	52	ø 72	9110 055 400-K990	9110 055 400-Q990	9110 055 400-U990
	85				
100 4"	100	ø 81	9110 053 300-M990	9110 053 300-Q990	9110 053 300-U990
	40	ø 46	9110 065 300-M990	9110 065 300-Q990	9110 065 300-U990
	52	ø 60	9110 067 300-M990	9110 067 300-Q990	9110 067 300-U990
	68				
	85	ø 72	9110 065 400-M990	9110 065 400-Q990	9110 065 400-U990
125 5"	100	ø 81	9110 063 500-M990	9110 063 500-Q990	9110 063 500-U990
	120	ø 95	9110 061 700-M990	9110 061 700-Q990	9110 061 700-U990
	85	ø 72	9110 075 400-M990	9110 075 400-Q990	9110 075 400-U990
	100	ø 81	9110 073 500-M990	9110 073 500-Q990	9110 073 500-U990
	120	ø 95	9110 071 700-M990	9110 071 700-Q990	9110 071 700-U990
160	160	ø 125	9110 075 500-M990	9110 075 500-Q990	9110 075 500-U990

Wearing part set - Actuator

Kind of actuation		Wear parts kit Actuator 1	Wear parts kit Actuator 2	Wear parts kit Actuator 3
manual actuator	-	9111 000 000-991		
Linear actuator	ø104 ø129 ø167 ø190 ø230		9112 000 001-991 9112 000 002-991 9112 000 003-991 9112 000 004-991 9112 000 005-991	
Diaphragm actuator	M02 M2 M4 M10			9115 000 000-991 9115 000 002-991 9115 000 004-991 9115 000 006-991

12 Classification

12.1 Structure of Order Number

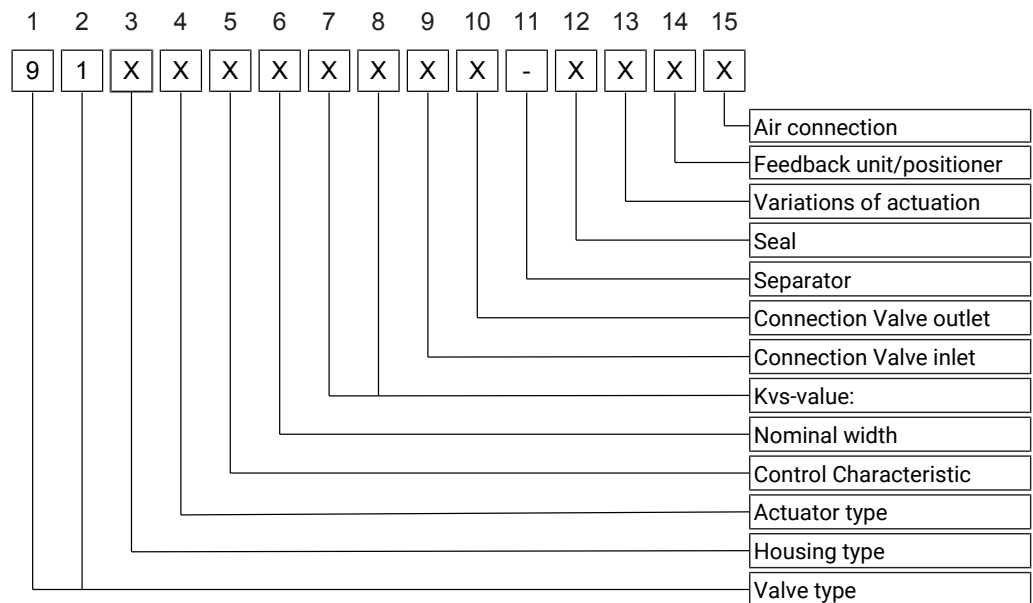

Valve type

91xx xxx xxx-xxxx	Pos. 1	Pos. 2
Valve Type: Control valve	9	1

Housing type

91Xx xxx xxx-xxxx	Pos. 3
Angle valve (L)	1
T-valve (T)	2
- Inclined (S)	3
Double body (LL)	4
Double body (LT)	5
Double body (TL)	6
Double body (TT)	7

Actuator type

91xX xxx xxx-xxxx	Pos. 4
Manual actuator	1
Piston Actuator (FC)	2
Piston Actuator (FO)	3
Piston Actuator (DA)	4
Diaphragm Actuator (FC)	5
Diaphragm Actuator (FO)	6
Diaphragm Actuator (DA)	7
Electric actuator (FC)	8
Electric actuator (FO)	9

Control Characteristic

91xx X xx xxx-xxxx	Pos. 5
DN, equal percentage	0
DN, linear	1
OD, equal percentage	2
OD, linear	3

Valve size

91xx xXx xxx-xxxx		Pos. 6
DN	OD	
DN 20	-	0
DN 25	OD 1"	1
DN 40	OD 1 1/2"	2
DN 50	OD 2 "	3
DN 65	OD 2 1/2"	4
DN 80	OD 3 "	5
DN 100	OD 4 "	6
DN 125	-	7
-	-	8
-	-	9

Kvs-value:

91xx xx X X xx-xxxx						
K _{vs} (m³/h)	Pos. 7	Pos. 8		K _{vs} (m³/h)	Pos. 7	Pos. 8
0.4	0	4		40	5	3
1.0	1	0		52	7	3
1.6	2	0		68	9	3
2.5	3	0		85	5	4
4.0	4	0		100	3	5
7.0	7	0		120	1	7
10	5	1		160	5	5
18	9	1				
26	3	3				

Connection Valve inlet

91xx xxx x X x-xxxx	Pos. 9			Pos. 9
Connection			Connection	
Welding end	0		Clamp tongue joint DIN 11853-3	A
Union (K/M) DIN 11851	1		APV groove flange	B
Thread DIN 11851	2		APV plain flange	C
KK-Small groove flange	3		Flange PN 6	D
KK-Small plain flange	4		Flange PN10	E
Hygienic - Lap-joint flange DIN 11853-2	5		Flange PN10/16 DIN 1092-1	F
Hygienic - Groove flange DIN 11853-2	6		VARIVENT®-groove flange	G
Clamp DIN 32676	7		VARIVENT®-lap-joint flange	H
Hygienic-Clamp DIN 11853-3	8		Union (K/M) SMS 1145	Y
-	9		Threaded end SMS 1145	K

Connection Valve outlet

91xx xxx xx X -xxxx	Pos. 10			Pos. 10
Connection			Connection	
Welding end	0		Clamp tongue joint DIN 11853-3	A
Union (K/M) DIN 11851	1		APV groove flange	B
Thread DIN 11851	2		APV plain flange	C
KK-Small groove flange	3		Flange PN 6	D
KK-Small plain flange	4		Flange PN10	E
Hygienic - Lap-joint flange DIN 11853-2	5		Flange PN10/16 DIN 1092-1	F
Hygienic - Groove flange DIN 11853-2	6		VARIVENT®-groove flange	G
Clamp DIN 32676	7		VARIVENT®-lap-joint flange	H
Hygienic-Clamp DIN 11853-3	8		Union (K/M) SMS 1145	Y
-	9		Threaded end SMS 1145	K

Separator

91xx xxx xxx X -xxxx	Pos. 11
KIESELMANN Valve	-

Seat Sealing/

Manual actuator	
91xx xxx xxx X -xxx	Pos. 12
EPDM	K
Metal / EPDM	M
HNBR	O
Metal / HNBR	P
FKM	S
Metal / FKM	U

Pneumatic Actuator / Electric Actuator	
91xx xxx xxx X -xxx	Pos. 12
EPDM	K
Metal / EPDM	M
HNBR	O
Metal / HNBR	P
FKM	S
Metal / FKM	U

Variations of actuation

91xx xxx xxx-xXxx			
Piston Actuator	Pos. 13	Diaphragm Actuator	Pos. 13
Manual actuator	0	FPG Diaphragm actuator M02	0
KIESELMANN Piston actuator Ø104	1	FPG Diaphragm actuator M1	1
KIESELMANN Piston actuator Ø129	2	FPG Diaphragm actuator M2	2
KIESELMANN Piston actuator Ø167	3	FPG Diaphragm actuator M3	3
KIESELMANN Piston actuator Ø190	4	FPG Diaphragm actuator M4	4
KIESELMANN Piston actuator Ø230	5	FPG Diaphragm actuator M9	5
-	6	FPG Diaphragm actuator M10	6
-	7	SAMSON Diaphragm actuator 3277	7
-	8	Electric Actuator	8
-	9	-	9

Feedback unit / Type of positioner

91xx xxx xxx-xxXx					
Manual actuator	Pos. 14	Pneumatic actuator	Pos. 14	Electric Actuator	Pos. 14
without	0	BÜRKERT Typ 8692	0	manuell Standard	0
Inductive sensor	1	BÜRKERT Typ 8792	1	HORA	1
-	2	GUTH DigiPos	2	-	2
-	3	SAMSON Typ 3725	3	-	3
-	4	BÜRKERT Typ 8694 IO-Link	4	-	4
-	5	SIEMENS SIPART P2	5	-	5
-	6	SAMSON Typ 3730-4	6	-	6
-	7	SAMSON Typ 3730-2	7	-	7
-	8	-	8	-	8
-	9	-	9	-	9

Air Connection Design

91xx xxx xxx-xxx X	
Air Connecting	Pos. 15
manuell	0
VA-Air connecting	1
-	2
-	...
-	9

Electrical actuator sizes

[Selection valid if an electric actuator (8 or 9) has been selected in position 4].

91xx xxx xxx-xxx X	
Electrical actuator sizes	Pos. 15
manuell Standard	0
HORA MC103/24	1
HORA MC253/24	2
HORA MC403/24	3
HORA MC1003/24	4
HORA MC1503/24	5
-	6
-	...
-	9

13 Appendix

13.1 Declaration of incorporation



Declaration of incorporation

Translation of the original

Manufacturer / authorised representative:

KIESELMANN GmbH

Paul-Kieselmann-Str. 4-10

75438 Knittlingen

Germany

Authorised representative:

(for compiling technical documents)

Achim Kauselmann

(Documentation / Development)

KIESELMANN GmbH

Paul-Kieselmann-Str. 4-10

75438 Knittlingen

Germany

<u>Product name</u>	<u>Function</u>
pneum. Lift actuators	Stroke movement
pneum. Rotary actuators	Rotary movement
Ball valves	Media cutoff
Butterfly valves	Media cutoff
Single seat valves	Media cutoff
Flow control valves	Control of liquefied media
Throttle valve	Control of liquefied media
Overflow valve	Definition of fluid pressure
Double seat valve	Media separation
Bellow valves	Sampling of liquids
Sampling valves	Sampling of liquids
Two way valves	Media cutoff
Tankdome fitting	Prevention of overpressure and vacuum, Tank cleaning
Safety valve	Prevention of overpressure

The manufacturer hereby states that the above product is considered as an incomplete machine in the sense defined in the Directive 2006/42/EC on Machinery. The above product is exclusively intended to be installed into a machine or an incomplete machine. The said product does not yet conform to all the relevant requirements defined in the Directive on Machinery referred to above for this reason.

The specific technical documents listed in Appendix VII, Part B, have been prepared. The Authorized Agent empowered to compile technical documents may submit the relevant documents if such a request has been properly justified.

Commissioning of an incomplete machine must not only be carried out if it has been determined that the respective machine into which the incomplete machine is to be installed conforms to the regulations set out in the Directive on Machinery referred to above.

The above product conforms to the requirements of the directives and harmonized standards specified below:

- Directive 2014/68/EU
- DIN EN ISO 12100 Safety of machinery

Knittlingen, 21.09.2017


i.V. Uwe Heisswolf
Head of Development


KIESELMANN
FLUID PROCESS GROUP